

TACAN SKE Chan 59 (112.2)	APP CRS 134°	Rwy Ldg TDZE 459 Apt Elev 459
--	------------------------	---

TACAN RWY 14R


SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

For inop ALS, increase S-14R Cat E visibility to 1½ SM.

ALS F-1

MISSED APPROACH: Climb to 2400 on SKE R-142 to WOMUG/14.1 DME and hold.

ATIS 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8
----------------------------	--	------------------------------------	-------------------------------

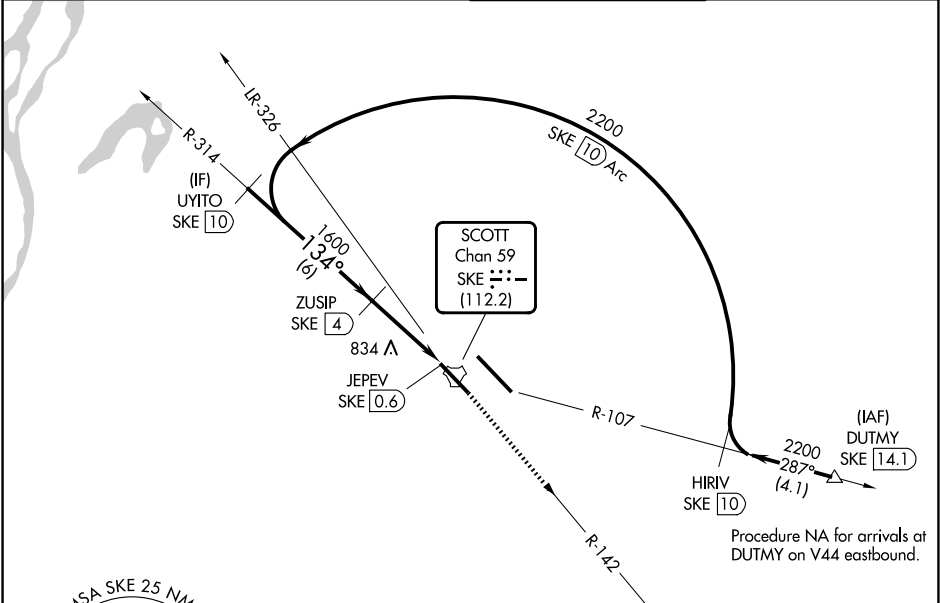

ESA W/IN 100 NM 3500

MISSED APCH FIX

SKE R-142 Chan 59 (112.2)

WOMUG SKE 14.1

322°

ELEV 459

TDZE 459

UYITO SKE 10

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).

2400

WOMUG SKE 14.1

2200

134°

1600

3.00° TCH 65

ZUSIP SKE 4

SKE 2.5

JEVEV SKE 0.6

6 NM

1.5 NM

1.9 NM

CATEGORY	A	B	C	D	E
S-14R	1100/24	641 (700-½)	1100-1⅓	641 (700-1⅓)	
CIRCLING	1100-1 641 (700-1)	1120-1 661 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)	1240-2¾ 781 (800-2¾)

REIL Rwy 14L

HIRL Rws 14L-32R and 14R-32L