


WAAS CH 70311 W05A	APP CRS 055°	Rwy Ldg TDZE 708 Apt Elev 727
--	------------------------	---

RNAV (GPS) Y RWY 5
BUFFALO NIAGARA INTL (BUF')

RNP APCH - GPS	MALSR	MISSED APPROACH: Climb to 3000 direct TRAVA and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.		

D-ATIS 135.35	BUFFALO APP CON 126.15 263.125	BUFFALO TOWER 120.5 257.8	GND CON 133.2 257.8
-------------------------	--	-------------------------------------	-------------------------------

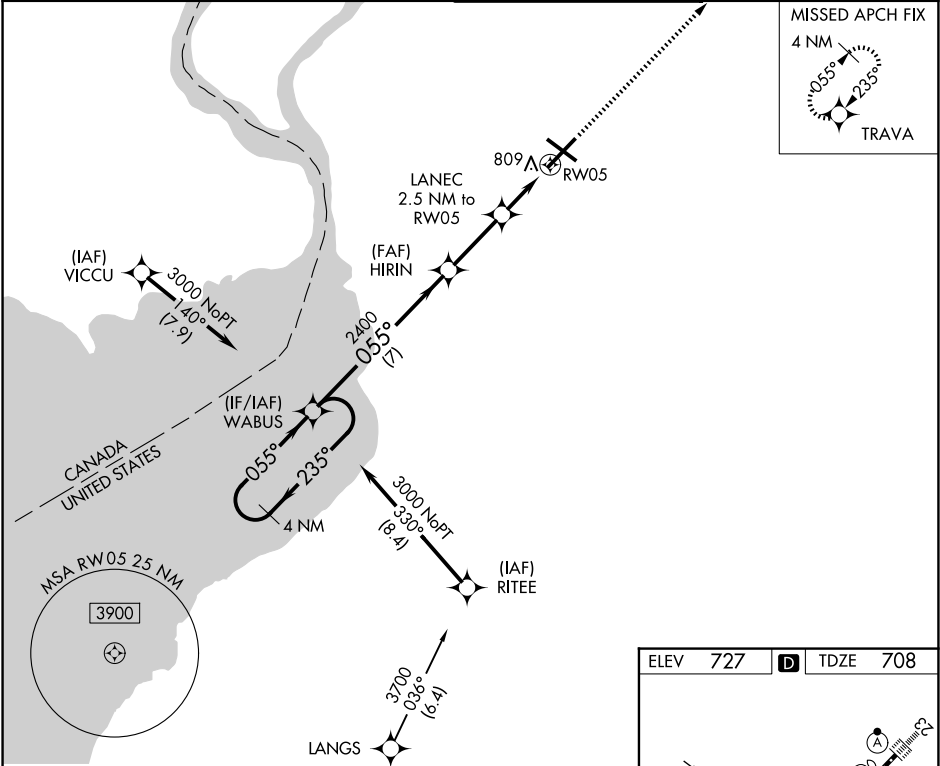

4 NM Holding Pattern		WABUS		HIRIN		LANEC 2.5 NM to RW05		3000 TRAVA	
3000		235°		055°		2400		*1.1 NM to RW05 *LNAV only	
GP 3.00° TCH 46				2400		*1520		RW05	
		7 NM		2.8 NM		1.4 NM		1.1 NM	
CATEGORY	A	B	C	D					
LPV DA	908/18				200 (200-½)				
LNAV/VNAV DA	997/24				289 (300-½)				
LNAV MDA	1060/24		352 (400-½)		1060/35		352 (400-¾)		
CIRCLING	1200-1		473 (500-1)		1220-1½		1340-2		
					493 (500-1½)		613 (700-2)		

