

LOC I-SYD 111.3	APP CRS 032°	Rwy Ldg TDZE 5328 Apt Elev 5344
---------------------------	------------------------	---

ILS or LOC RWY 3


CASPER/NATRONA COUNTY INTL (CPR)

⚠ DME from DDY VOR/DME. Simultaneous reception of I-SYD and DDY DME required. When local alimeter setting not received, use Douglas alimeter setting and increase DA to 5697 feet and all MDAs 180 feet, increase S-ILS visibility all Cats ¼ SM and S-LOC visibility Cat B, C, D and Circling Cats B, C, D visibility ½ SM, increase MAMUE FIX MINIMUM Circling visibility Cat C ½ SM and Cat D ¼ SM. For inoperative MALSR when using Douglas alimeter setting increase S-ILS visibility all Cats to 1½ mile. MAMUE FIX MINIMUMS: For inoperative MALSR, increase S-LOC visibility Cats C, and D to 1½ mile. #RVFR 1800 authorized with use of FD or AP or HUD to DA.

MALSR 

MISSED APPROACH: Climb to 7500 then left turn direct DDY VOR/DME and hold.

ATIS 126.15	CASPER APP CON ★ 120.65 354.1	CASPER TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9 257.8	UNICOM 122.95
-----------------------	---	---	-------------------------	--------------------------------	-------------------------

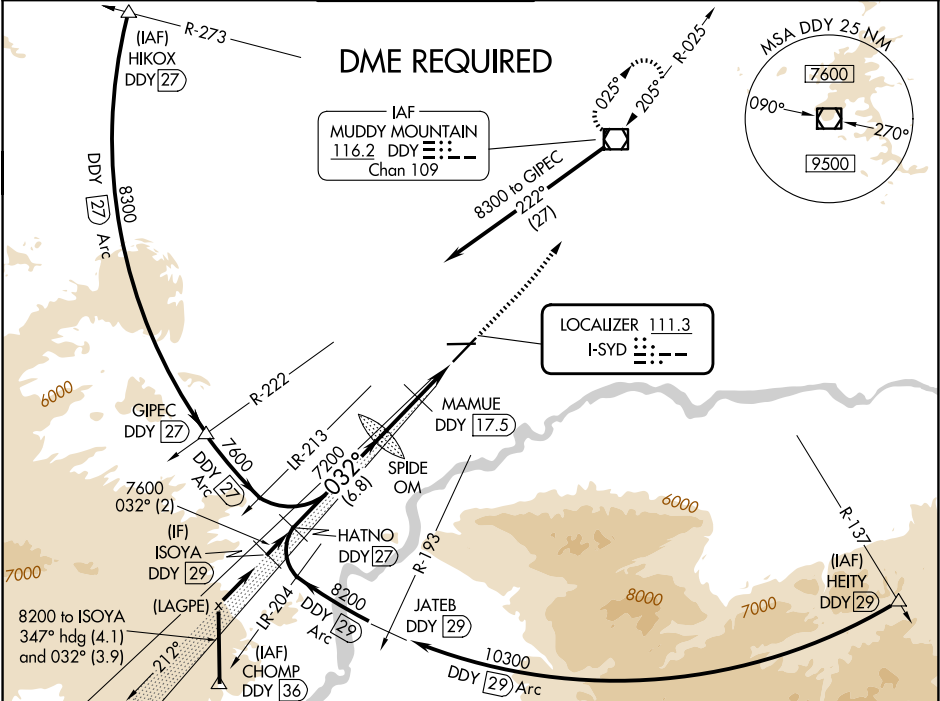

ISOYA DDY (29) *6400 when using Douglas alimeter setting.					7500		DDY		ELEV 5344	TDZE 5328
HATNO DDY (27)					SPIDE OM		MAMUE DDY (17.5)			
8200					032°		7600			
7200					*6220		DDY (14.7) *LOC only			
GS 3.00° TCH 50					2 NM		6.8 NM		2.9 NM	
2.7 NM										
CATEGORY A B C D										
S-ILS 3 # 5528/24 200 (200-1/2)										
S-LOC 3 6220/40 892 (900-3/4) 6220-2 892 (900-2)										
CIRCLING 6220-1 1/4 876 (900-1 1/4) 6220-2 1/2 876 (900-2 1/2) 6220-2 3/4 876 (900-2 3/4)										
MAMUE FIX MINIMUMS										
S-LOC 3 5740/24 412 (400-1/2) 5740/40 412 (400-3/4)										
CIRCLING 5740-1 5800-1 5860-1 1/2 6200-2 3/4 396 (400-1) 456 (500-1) 516 (600-1 1/2) 856 (900-2 3/4)										
FAF to MAP 5.6 NM										
Knots 60 90 120 150 180										
Min:Sec 5:36 3:44 2:48 2:14 1:52										