


APP CRS	Rwy Ldg	7000
211°	TDZE	43
	Apt Elev	46

RNAV (RNP) Z RWY 21
CHARLESTON AFB/INTL (CHS)

T For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). GPS required.	MISSED APPROACH: Climb to 3000 on track 211° to FEPID and hold.
--	---

D-ATIS 124.75	CHARLESTON APP CON 120.7 306.925	CHARLESTON TOWER 126.0 239.0	GND CON 121.9 348.6	CLNC DEL 127.325 291.65	CPDLC
-------------------------	--	--	-------------------------------	-----------------------------------	-------

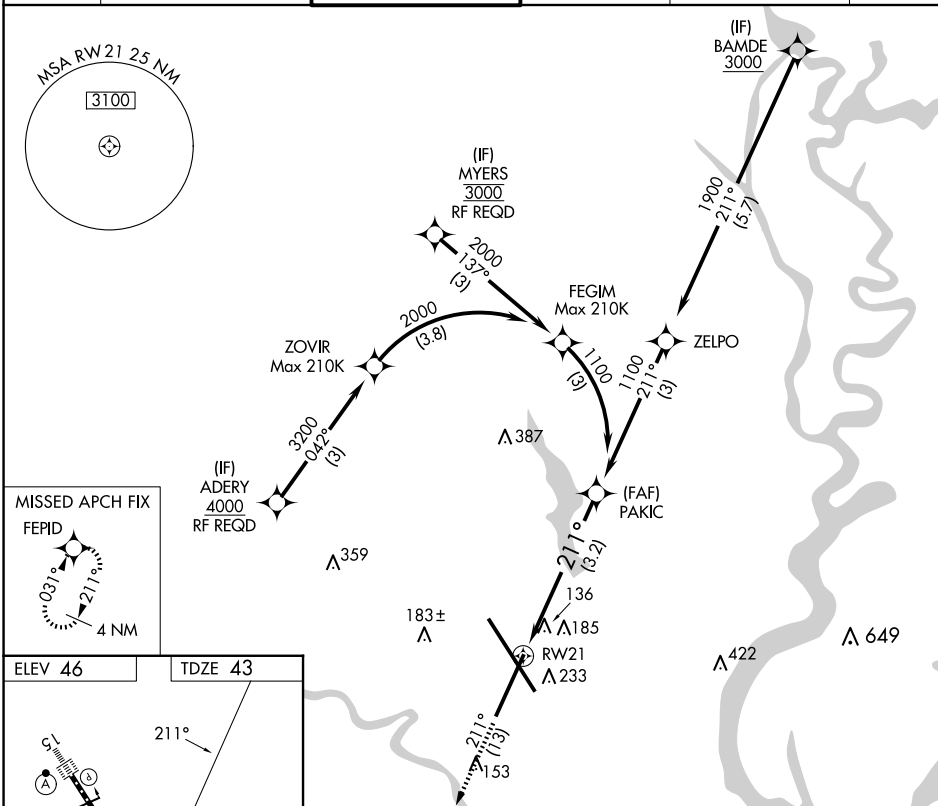

3000
↑
tr
211°

See planview for multiple IF locations.

PAKIC
1100

1100

GP 3.00°
TCH 50

3.2 NM

211°

RW21

3000 X 150

7000 X 150

0.3% Up

33

33

TDZ/CL Rwy 15

REIL Rwy 3 and 21

HIRL Rwy 3-21 and 15-33

CATEGORY	A	B	C	D
RNP 0.21 DA		427-1 $\frac{1}{8}$	384 (400-1 $\frac{1}{8}$)	
RNP 0.30 DA		455-1 $\frac{3}{8}$	412 (500-1 $\frac{3}{8}$)	

AUTHORIZATION REQUIRED