

WAAS CH 86200 W36B	APP CRS 003°	Rwy Ldg 10000 TDZE 707 Apt Elev 748
--	------------------------	--

RNAV (GPS) Y RWY 36C

CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.


⚠ Circling NA at night. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. LNAV procedure NA during simultaneous operations.

ALSF-2



MISSED APPROACH:
Climb to 3000 direct
TOMME and hold.


D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1	257.8 (Rwys 18L-36R)	121.8 348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4	257.8 (Rwy 18C-36C)	
	134.75 (296°-360°)		133.35	257.8 (Rwy 18R-36L)	121.9 348.6 (E)

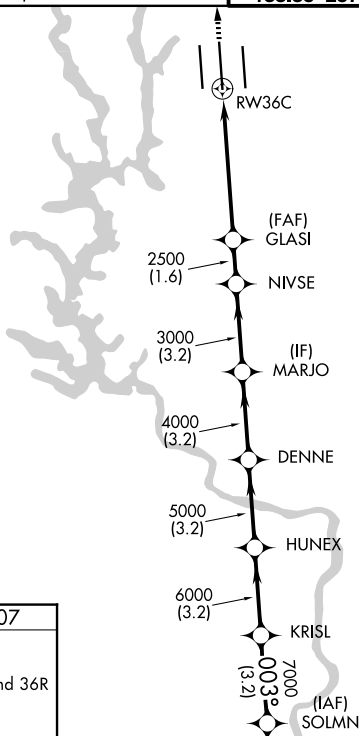

MISSED APCH FIX



ELEV 748	D	TDZE 707
HIRL all Rwy's REIL Rwy's 18L and 23 TDZ/CL Rwy's 18R, 36L, 36C and 36R		

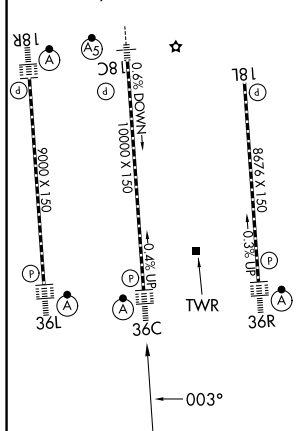

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).	
*RNAV only. *1.7 NM to RW36C	
CATEGORY	D
LPV DA	907/18 200 (200-½)
RNAV/VNAV DA	1229-1⅓ 522 (500-1⅓)
RNAV MDA	1320/40 613 (600-¾) 1320-1⅓ 613 (600-1⅓)
CIRCLING	1380-1 632 (700-1) 1500-2¼ 752 (800-2¼) 1500-2½ 752 (800-2½)