

|                        |          |             |
|------------------------|----------|-------------|
| APP CRS<br><b>047°</b> | Rwy Ldg  | <b>5927</b> |
|                        | TDZE     | <b>619</b>  |
|                        | Apt Elev | <b>620</b>  |

RNAV (RNP) Y RWY 4R


CHICAGO MIDWAY INTL (MDW)

RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

|                         |                                         |                                      |                           |                            |       |
|-------------------------|-----------------------------------------|--------------------------------------|---------------------------|----------------------------|-------|
| D-ATIS<br><b>132.75</b> | CHICAGO APP CON<br><b>128.2 353.875</b> | MIDWAY TOWER<br><b>135.2 269.125</b> | GND CON<br><b>118.075</b> | CLNC DEL<br><b>124.625</b> | CPDLC |
|-------------------------|-----------------------------------------|--------------------------------------|---------------------------|----------------------------|-------|

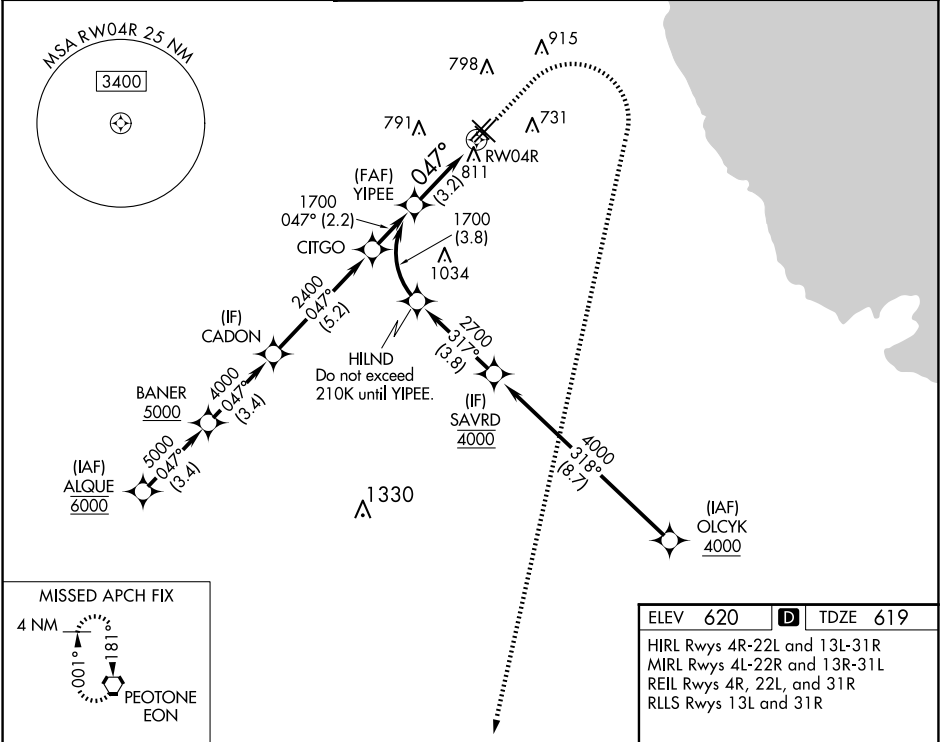

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).

1100

2600

EON

YIPEE

1700

047°

RW04R

GP 3.00°

TCH 50

See planview for multiple IF locations.

3.2 NM

| CATEGORY    | A | B       | C            | D |
|-------------|---|---------|--------------|---|
| RNP 0.10 DA |   | 951/50  | 332 (400-1)  |   |
| RNP 0.20 DA |   | 1020/60 | 401 (400-1¼) |   |
| RNP 0.30 DA |   | 1077-1⅜ | 458 (500-1⅝) |   |

AUTHORIZATION REQUIRED

