


WAAS CH 69618 W17A	APP CRS 172°	Rwy Ldg TDZE 6187 Apt Elev 6187
--	------------------------	---

RNAV (GPS) Y RWY 17L

CITY OF COLORADO SPRINGS MUNI (COS)

RNP APCH - GPS.		MALSR 	MISSED APPROACH: Climb to 9000 direct CEGIX and on track 100° to DRAKE and hold.	
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 44°C. For inop MALSR, increase LNAV Cat C/D visibility to 2½ SM.				
ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6		GND CON 121.7 348.6
				CLNC DEL 134.45 363.125

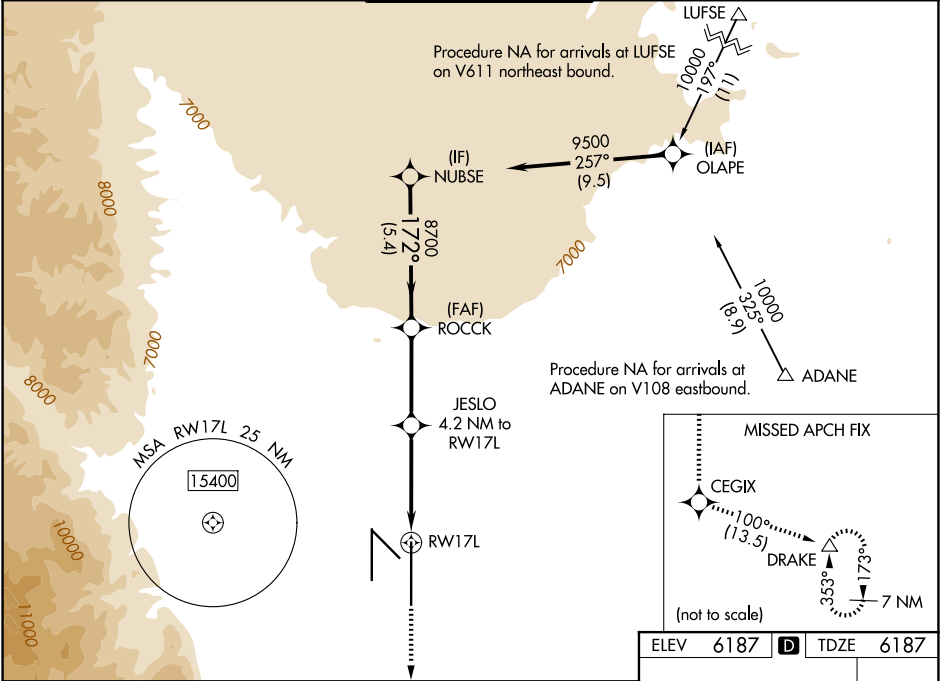

9000

↑

CEGIX

✱

tr 100°

DRAKE

△

ROCCK

8700

NUBSE

9500

JESLO

4.2 NM to RW17L

2.4 NM to RW17L

7580

RW17L

2.4 NM

1.8 NM

3.5 NM


5.4 NM

172°

8700

GP 3.00° TCH 57

CATEGORY	A	B	C	D
LPV DA	6387/18		200 (200-½)	
LNAV/VNAV DA	6602/45		415 (500-¾)	
LNAV MDA	7000/24 813 (900-½)	7000/40 813 (900-¾)	7000-1⅞	813 (900-1⅞)
CIRCLING	7000-1¼	813 (900-1¼)	7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)

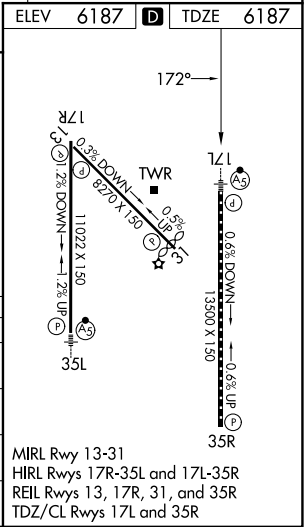

SW-1, 22 JAN 2026 to 19 FEB 2026

SW-1, 22 JAN 2026 to 19 FEB 2026