


APP CRS	Rwy Ldg	7352
133°	TDZE	485
	Apt Elev	487

RNAV (RNP) X RWY 13L

DALLAS LOVE FLD (DAL)

RNP AR APCH.	MALSR	MISSED APPROACH: Climb to 3000 direct DATLE and on track 115° to DUMPY and hold.
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below +6°C or above 54°C. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500.	MALSR	

D-ATIS	LONE STAR APP CON	LOVE TOWER	GND CON
120.15	124.3 282.275 (N) 125.2 343.65 (S)	123.7 239.3	121.75 348.6

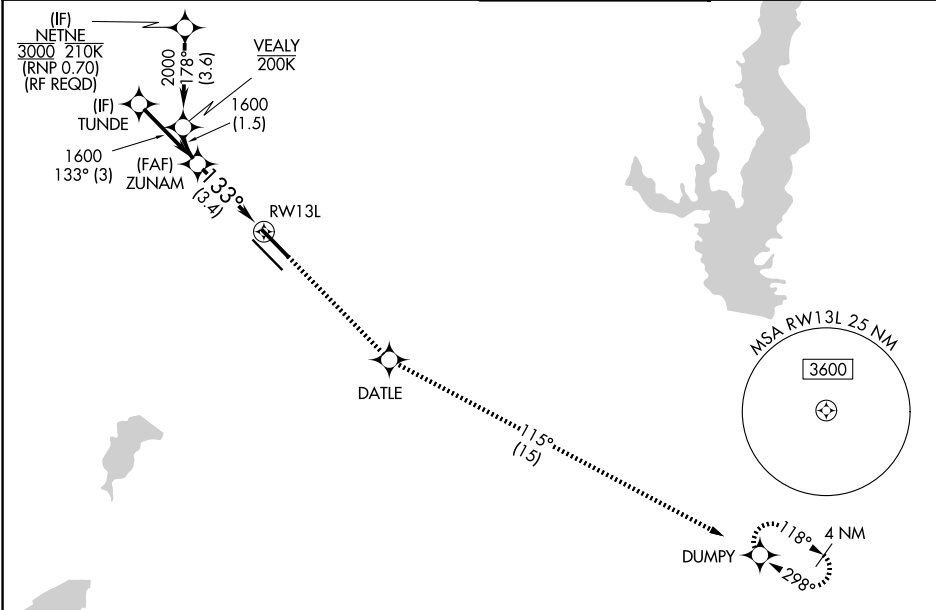

ELEV 487		D		TDZE 485					
		3000		DATLE		tr 115°		DUMPY	
		See planview for multiple IF locations.							
CATEGORY	A	B	C	D					
RNP 0.11 DA	754/24		269 (300-½)						
RNP 0.30 DA	846/40		361 (400-¾)						
AUTHORIZATION REQUIRED									

ELEV 487		D		TDZE 485					
		3000		DATLE		tr 115°		DUMPY	
		See planview for multiple IF locations.							
CATEGORY	A	B	C	D					
RNP 0.11 DA	754/24		269 (300-½)						
RNP 0.30 DA	846/40		361 (400-¾)						
AUTHORIZATION REQUIRED									

ELEV 487		D		TDZE 485					
		3000		DATLE		tr 115°		DUMPY	
		See planview for multiple IF locations.							
CATEGORY	A	B	C	D					
RNP 0.11 DA	754/24		269 (300-½)						
RNP 0.30 DA	846/40		361 (400-¾)						
AUTHORIZATION REQUIRED									

