

APP CRS
313°

Rwy Ldg
TDZE **476**
Apt Elev **487**


RNAV (RNP) Z RWY 31L
DALLAS LOVE FLD (DAL)

▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 48°C (119°F). Simultaneous approach authorized. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop MALSR, increase RNP 0.30 visibility all Cats to 2½ miles.

MALSR

MISSED APPROACH: Climb to 1700 then climbing right turn to 4000 direct TADDI and hold.

D-ATIS 120.15	LONE STAR APP CON 124.3 282.275 (N) 125.2 343.65 (S)	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6
-------------------------	--	----------------------------------	--------------------------------

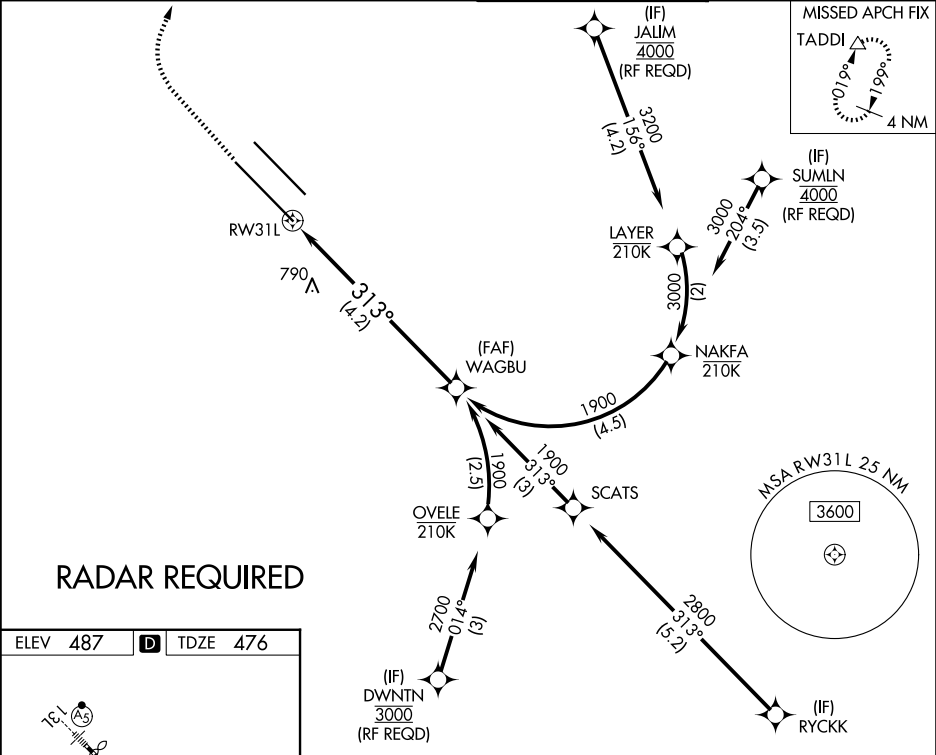

1700 4000 TADDI

See planview for multiple IF locations.

RWY 31

WAGBU

1900

1900

GP 3.08° TCH 55

4.2 NM

CATEGORY	A	B	C	D
RNP 0.30 DA	1117-15%	641 (700-15%)		

AUTHORIZATION REQUIRED