

WAAS CH 99723 W13B	APP CRS 133°	Rwy Ldg 7352 TDZE 485 Apt Elev 487
--	------------------------	---

RNAV (GPS) Z RWY 13L
DALLAS LOVE FLD (DAL)

RNP APCH.


▼ Simultaneous approach authorized. Use of FD or AP required during simultaneous operations.
▲ LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -6°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to RVR 5500.

MALSR




MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct SOLD0 and hold.

D-ATIS 120.15	LONE STAR APP CON 124.3 282.275 (N) 125.2 343.65 (S)	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6
-------------------------	--	----------------------------------	--------------------------------

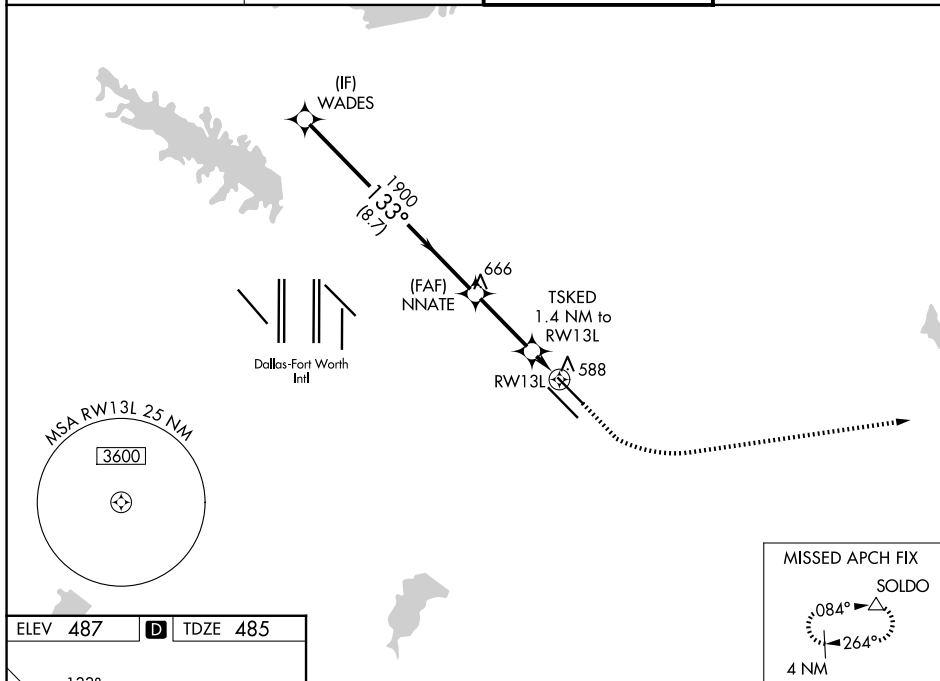

ELEV 487	D	TDZE 485
----------	----------	----------

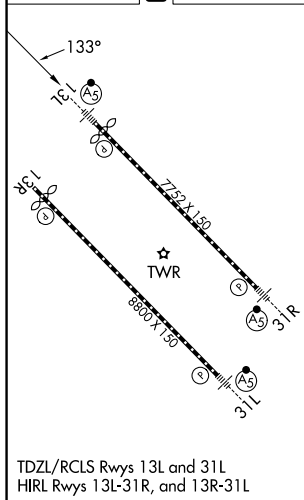

WADES <u>2500</u> GP 3.00° TCH 55		NNATE 1900 1900 *980		TSكد 1.4 NM to RW13L RW13L *LNAV only.		1000 3000 SOLD0 △
733°		8.7 NM		2.9 NM		1.4 NM
CATEGORY	A	B	C	D		
LPV DA	685/18		200 (200-½)			
LNAV/ VNAV	764/24		279 (300-½)			
LNAV MDA	840/24	355 (400-½)	840/30	355 (400-¾)		
CIRCLING	1000-1 513 (600-1)	1140-1 653 (700-1)	1220-2 733 (800-2)	1520-3 1033 (1100-3)		