

LOC/DME I-VUQ 111.9 Chan 56	APP CRS 241°	Rwy Ldg TDZE 10900 997 Apt Elev 1009
---	------------------------	--



ILS or LOC RWY 24R
JAMES M COX DAYTON INTL (DAY)

Simultaneous approach authorized.
For inop ALS, increase S-LOC 24R Cat C/D visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 3000 then right turn direct DQN VOR/DME and hold.

ATIS 125.8	COLUMBUS APP CON 134.45 323.15	DAYTON TOWER 119.9 257.7	GND CON 121.9
----------------------	--	------------------------------------	-------------------------

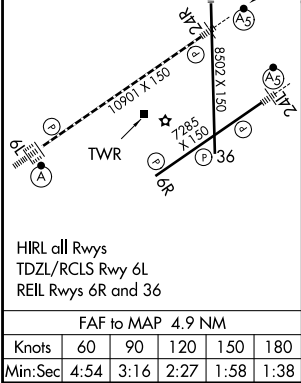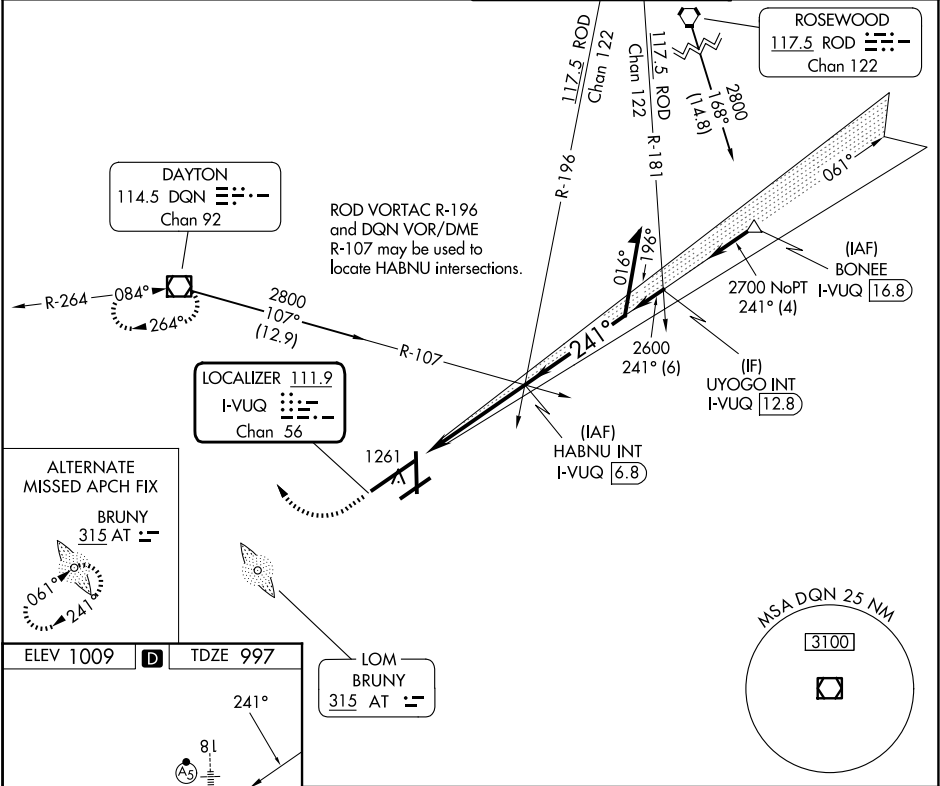

3000

↑

↗

DQN

□

HABNU INT

I-VUQ 6.8

Remain within 10 NM

2600

061°

2800

241°

2600

GS 3.00°

TCH 55

I-VUQ 3

I-VUQ 2

1.1 NM

3.8 NM

CATEGORY	A	B	C	D
S-ILS 24R	1203/24		206 (200-½)	
S-LOC 24R	1400/24	403 (400-½)	1400/40	403 (400-¾)
CIRCLING	1580-1	571 (600-1)	1580-1½ 571 (600-½)	1640-2 631 (700-2)