
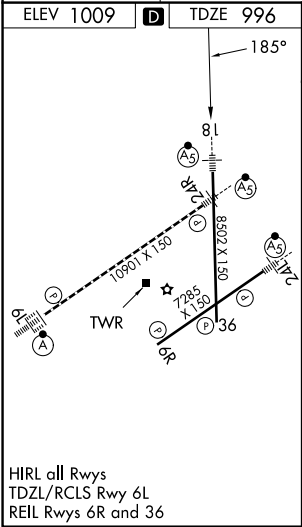


WAAS CH 86914 W18A	APP CRS 185°	Rwy Ldg TDZE 996 Apt Elev 1009
--	------------------------	--

RNAV (GPS) RWY 18
JAMES M COX DAYTON INTL (DAY)

RNP APCH.	MALS	MISSED APPROACH: Climb to 3000 direct GUPNE and track 255° to CAMMS and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cts visibility to RVR 4500. ** RVR 1800 authorized with use of FD or AP or HUD to DA.	AS	

ATIS 125.8	COLUMBUS APP CON 134.45 323.15	DAYTON TOWER 119.9 257.7	GND CON 121.9
----------------------	--	------------------------------------	-------------------------

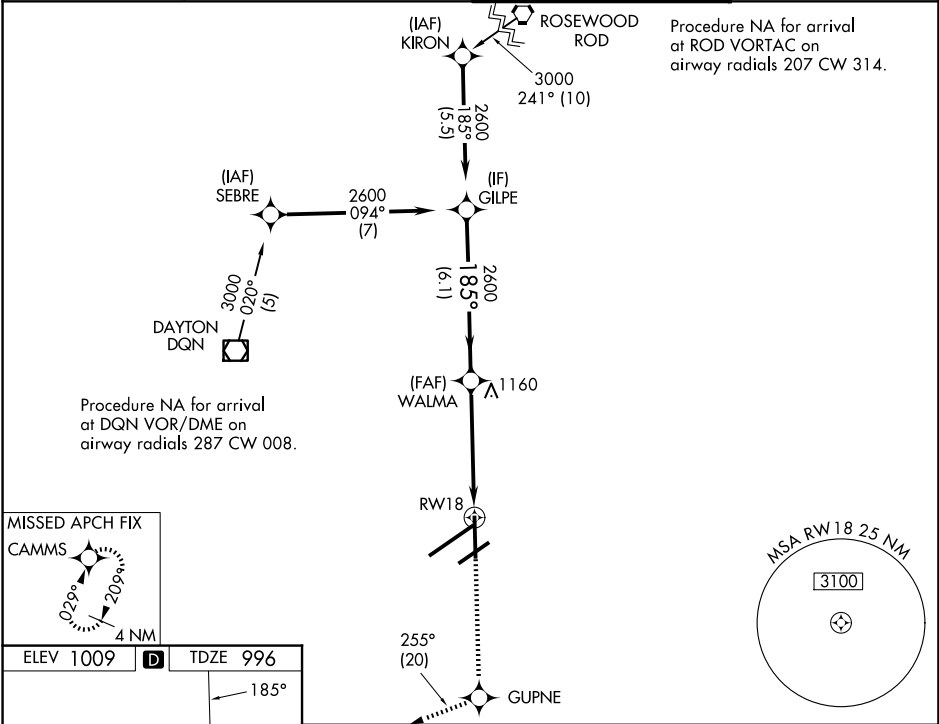

3000	GUPNE	tr 255°	CAMMS	
				
* LNAV only * 1.2 NM to RW18 RW18 WALMA 2600 GILPE 2600 GP 3.00° TCH 55 1.2 NM 3.7 NM 6.1 NM 185° 2600 2600				
CATEGORY	A	B	C	D
LPV DA **	1196/24 200 (200-½)			
LNAV/VNAV DA	1274/24 278 (300-½)			
LNAV MDA	1420/24 424 (500-½)		1420/40 424 (500-¾)	
CIRCLING	1580-1 571 (600-1)		1580-1½ 571 (600-1½) 1640-2 631 (700-2)	