

WAAS CH 90414 W06B	APP CRS 061°	Rwy Ldg TDZE Apt Elev	7001 1009 1009
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 6R
JAMES M COX DAYTON INTL (DAY)

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 6R helicopter visibility reduction below $\frac{3}{4}$ SM NA. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.

MISSED APPROACH: Climb to 3000 direct TARRY and hold.

ATIS 125.8	COLUMBUS APP CON 134.45 323.15	DAYTON TOWER 119.9 257.7	GND CON 121.9
---------------	-----------------------------------	-----------------------------	------------------

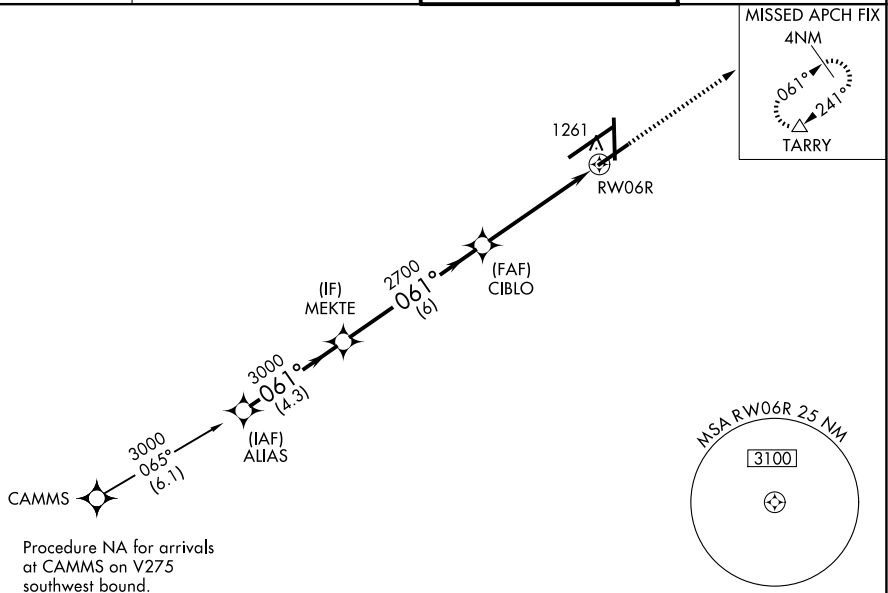

Procedure NA for arrivals
at CAMMS on V275
southwest bound.

CATEGORY	A	B	C	D
LPV DA	1259- ³ / ₄ 250 (300- ³ / ₄)			
RNAV/VNAV DA	1496-1 ³ / ₄ 487 (500-1 ³ / ₄)			
RNAV MDA	1520-1 511 (600-1)	1520-1 ¹ / ₂ 511 (600-1 ¹ / ₂)	1520-1 ³ / ₄ 511 (600-1 ³ / ₄)	
CIRCLING	1580-1 571 (600-1)	1580-1 ¹ / ₂ 571 (600-1 ¹ / ₂)	1640-2 631 (700-2)	

