


APP CRS	Rwy Ldg	10000
216°	TDZE	642
	Apt Elev	645


RNAV (RNP) X RWY 22R
DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.	MALSR	MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct DOHNT and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 5500.		

D-ATIS	DETROIT APP CON	METRO TOWER	GND CON	CLNC DEL	CPDLC
133.675	124.05 284.0	135.0 317.725	121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	120.65	

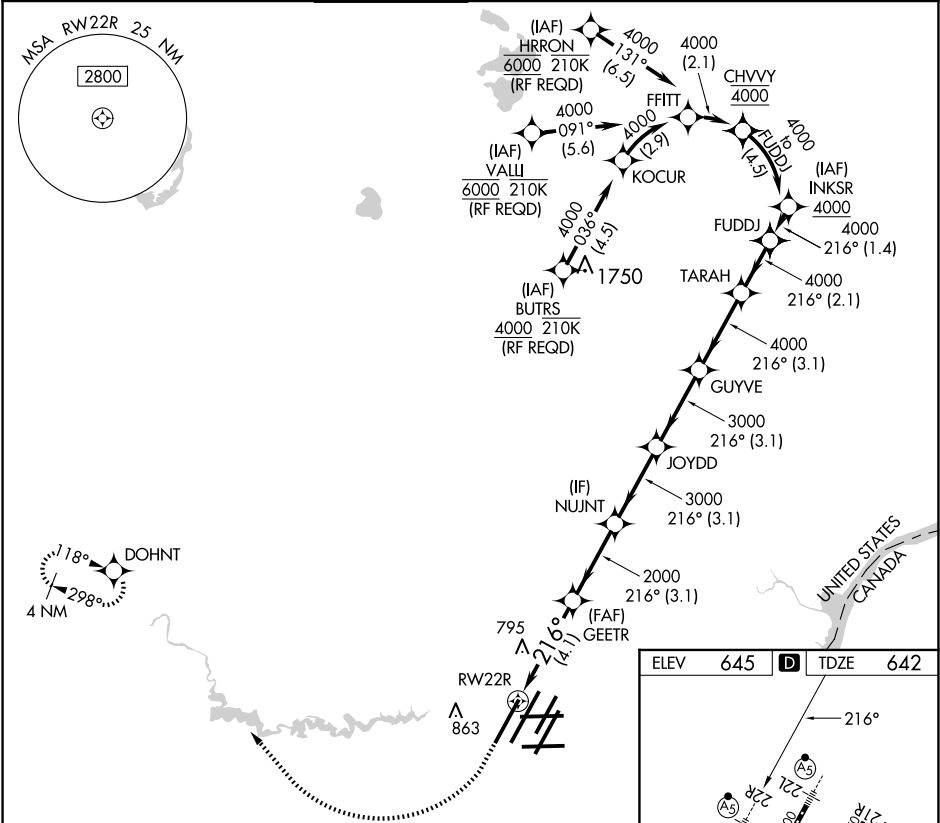

1100	4000	DOHNT	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).						
			GEETR	NUJNT	JOYDD	GUYVE	TARAH	FUDDJ	
			2000	3000	3000	4000	4000	4000	
			4.1 NM	3.1 NM	3.1 NM	3.1 NM	3.1 NM	2.1 NM	
			GP 3.00° TCH 55						
CATEGORY			A		B		C		D
RNP 0.30 DA					987/30		345 (400-5%)		

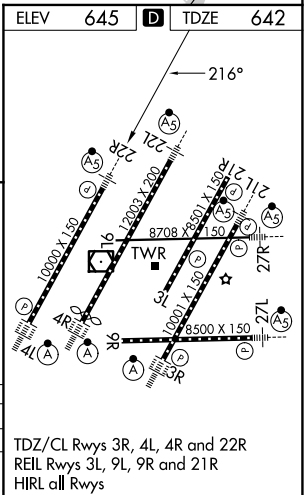

AUTHORIZATION REQUIRED