

WAAS CH 42827 W06A	APP CRS 062°	Rwy Ldg TDZE Apt Elev	7401 944 955
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

ELMIRA/CORNING RGNL (ELM)

RNP APCH.

▼

⚠


❄ -21°C

Inop table does not apply to LNAV/VNAV all Cats. Circling Rwy 10 NA at night. Circling NA to Rwys 5 and 23. Circling NA for Cat D south of Rwys 10 and 28. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.
RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 4000 direct IREKE and hold.

ATIS 125.475	ELMIRA APP CON ★ 128.425 257.8	ELMIRA TOWER ★ 121.1 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9	UNICOM 122.95
------------------------	--	---	-------------------------	--------------------------	-------------------------

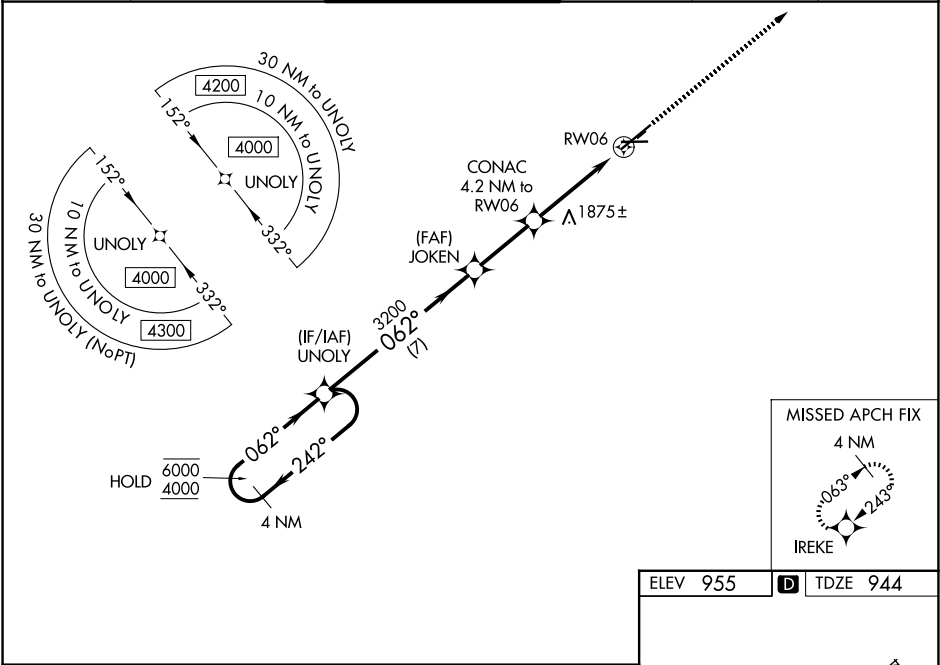

4 NM Holding Pattern UNOLY

GP 3.00° TCH 52

6000 ← 242°

4000 → 062°

UNOLY

JOKEN 3200

CONAC 4.2 NM to RW06

* 3 NM to RW06

RW06

* 2320

7 NM

2.8 NM

1.2 NM

3 NM

4000

IREKE

* INAV only

CATEGORY	A	B	C	D
LPV DA #	1144/24		200 (200-½)	
INAV/VNAV DA	2138-5		1194 (1200-5)	
INAV MDA	1940/40 996 (1000-¾)	1940/55 996 (1000-1)	1940-2½	996 (1000-2½)
CIRCLING	2020-1¼ 1065 (1100-1¼)	2080-1½ 1125 (1200-1½)	2100-3 1145 (1200-3)	2340-3 1385 (1400-3)

TWR

8001 X 150

5404 X 150

01

02

062°

HIRL Rwy 6-24 0

MIRL Rwy 10-28 0

REIL Rwys 6 and 24