

RNAV (GPS) Y RWY 35L

APCH CRS	Rwy Idg
003°	9217
	THRE
	1307
	Arpt Elev
	1307


[USAF]

VANCE AFB (KEND)

RNP APCH - GPS	SALS	MISSED APPROACH: Climb to 1900, then climbing left turn to 4300 direct CERPA and hold.
RADAR required	(A2)	
* When ALS inop, increase vis to 1 mile. Circling visibility reduction by helicopters not authorized.		


ATIS ★	APP CON	TOWER ★	GND CON
115.4 263.15	125.45 388.2 (E) 126.75 346.325 (W)	124.05 259.1	121.675 289.4

FOR USE BY 71FTW
AIRCRAFT ONLY

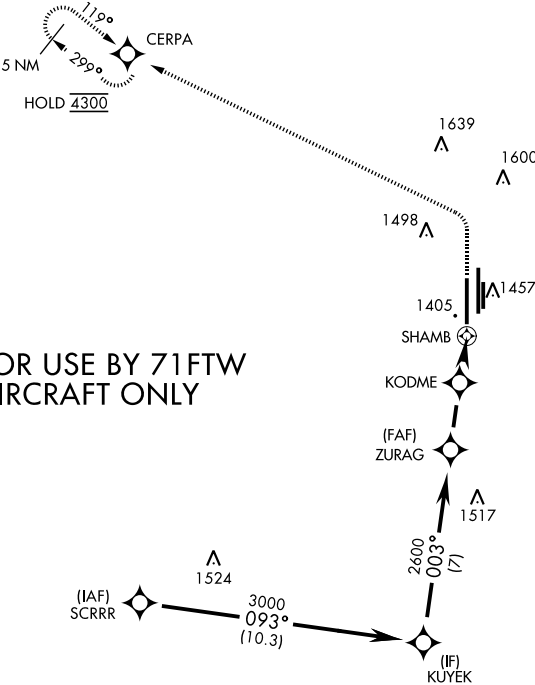

EMERG SAFE ALT 100 NM 4500

KUYEK 3000 003° 2600 ZURAG 2.54 TCH 47 KODME 1920 SHAMB 0.7 NM to SHAMB					
1900 4300 CERPA					
2.4 NM 1.7 NM 0.5 NM					
CATEGORY	A	B	C	D	E
LNAV MDA *	1660 -3/4 353 (400 -3/4)				
CIRCLING	1760-1 453 (500-1)	1800-1 1/2 493 (500-1 1/2)	1900-2 593 (600-2)	2400-3 1093 (1100-3)	

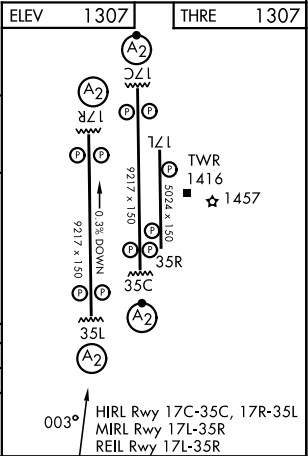

RNAV (GPS) Y RWY 35L