

LOC/DME I-ERI	APP CRS	Rwy Ldg
110.3	064°	7501
Chan 40		TDZE 732
		Apt Elev 732

ILS or LOC RWY 6

ERIE INTL/TOM RIDGE FLD (ERI)

DME required. RADAR required for procedure entry. RNP APCH - GPS.

▼

▲

Circling to Rwy 2, 20 NA at night. Circling NA southeast of Rwy 6-24. Autopilot coupled approach NA below 1580. For inop ALS, increase S-LOC 6 Cats C and D visibility to RVR 6000.


MALSR

▲

▲

MISSED APPROACH:
Climb to 3200 direct JONLI and hold.

ATIS	BUFFALO APP CON★	ERIE TOWER★	GND CON	CLNC DEL	UNICOM
120.35	121.0 257.8	118.1 (CTAF) 0 257.8	121.9	126.8	122.95

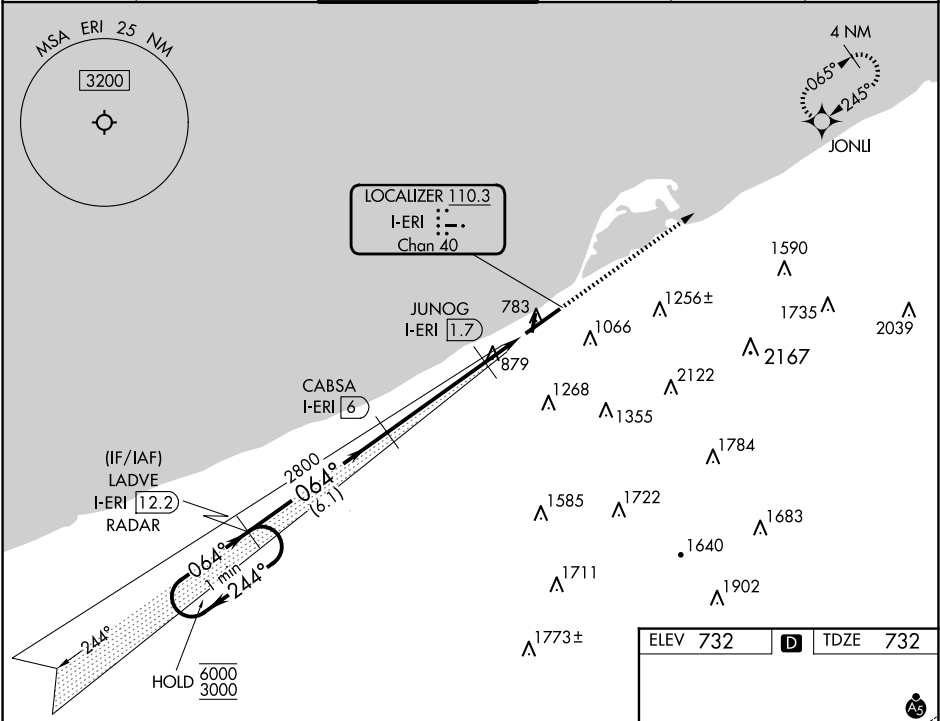

Use I-ERI DME when on the localizer course.

One Minute Holding Pattern

GS 3.00° TCH 55

6000 3000

244° 064° 064°

LADVE I-ERI 12.2 RADAR

CABSA I-ERI 6

2800 1420

JUNOG I-ERI 1.7

I-ERI DME ANTENNA

I-ERI 0.8 I-ERI 0.3

6.1 NM 4.3 NM 0.9 NM 1.1 NM

CATEGORY	A	B	C	D
S-ILS 6	982/24 250 (300-1/2)			
S-LOC 6	1140/24 408 (500-1/2)	1140/40 408 (500-3/4)		
◼ CIRCLING	1160-1 428 (500-1)	1200-1 468 (500-1)	1200-1 1/2 468 (500-1/2)	1340-2 608 (700-2)

ELEV 732 D TDZE 732

TWR

03200 X 150 0

0 2

064°

8420 X 150

HIRL Rwy 6-24 1
MIRL Rwy 2-20 0