


WAAS CH 70710 W09A	APP CRS 092°	Rwy Ldg TDZE 147 Apt Elev 147	6502
--	------------------------	---	-------------

RNAV (GPS) RWY 9

FLORENCE RGNL (F'L.O)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 2000 direct ESVAC and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Circling Rwy 1, 19 NA at night.		

ATIS 123.625	FLORENCE APP CON★ 118.6 341.7 (256°-074°) 135.25 316.15 (075°-255°)	FLORENCE TOWER★ 125.1 (CTAF) 0 353.85	GND CON 121.9 353.85	UNICOM 122.95
------------------------	---	---	--------------------------------	-------------------------

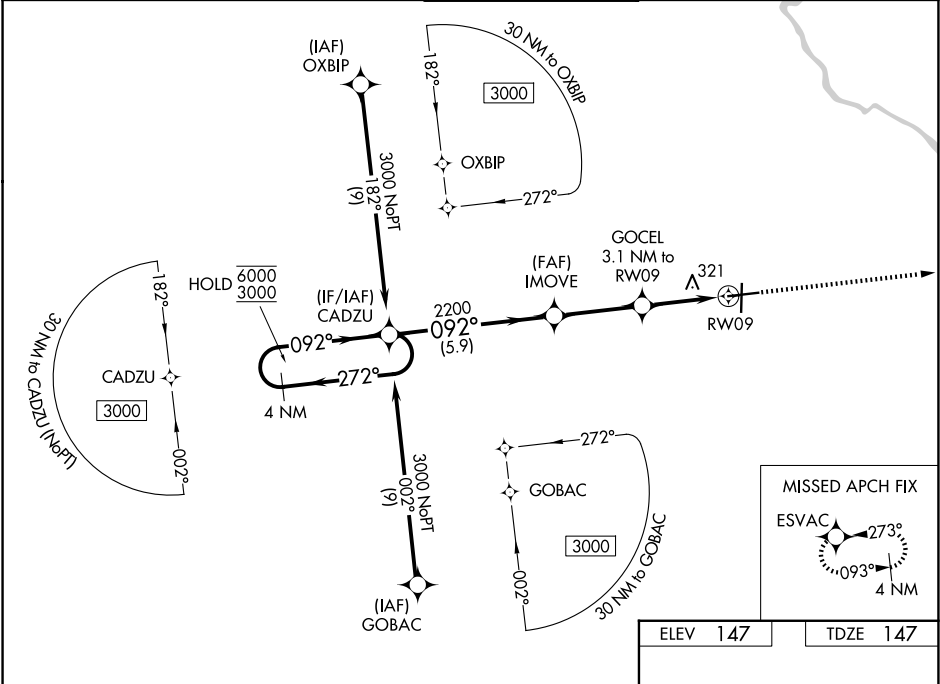

4 NM Holding Pattern		CADZU		2000		ESVAC
6000 ← 272°		3000 → 092°		092°		2200
GP 3.00°		TCH 59		2200		1180
		5.9 NM		3.2 NM		1.9 NM
						1.2 NM
CATEGORY	A	B	C	D		
LPV DA	347-½		200 (200-½)			
LNAV/VNAV DA	603-¾		456 (500-¾)			
LNAV MDA	580-½	433 (500-½)	580-¾	433 (500-¾)		
CIRCLING	640-1 493 (500-1)	660-1 513 (600-1)	900-2¼ 753 (800-2¼)	900-2½ 753 (800-2½)		

