
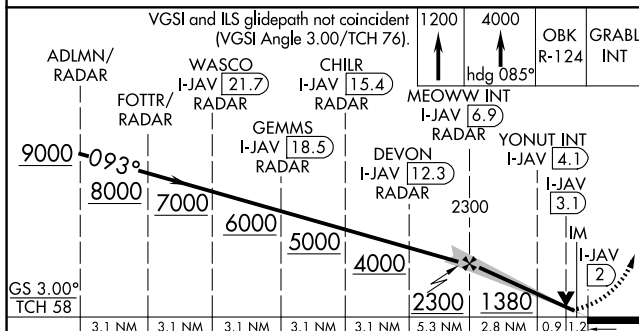
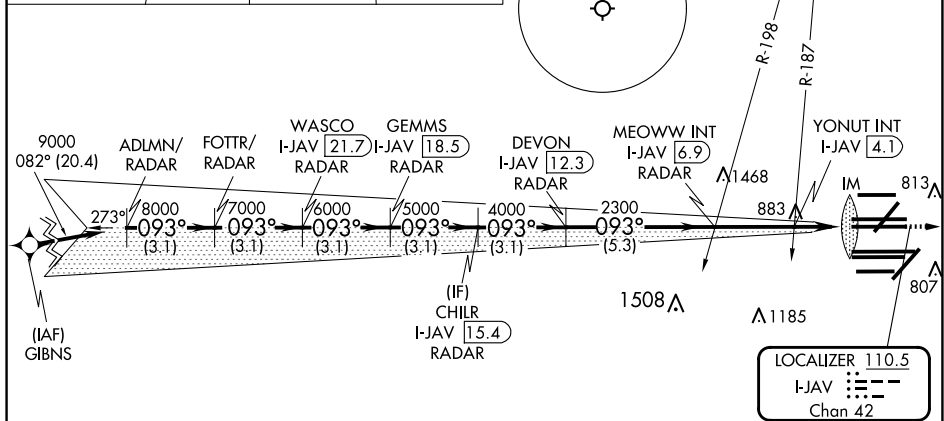


ILS or LOC RWY 9R
CHICAGO O'HARE INTL (ORD)

ALSF-2 MISSED APPROACH: Climb to 1200 then climb to 4000 on heading 085° and OBK VOR/DME R-124 to GRABL INT/OKB 26.9 DME/RADAR and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 126.9 348.0	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLINC DEL 121.6	CPDLC
--	--	------------------------------------	---	---	---------------------------	-------

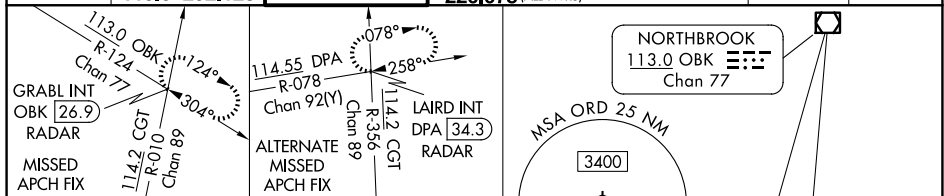

CATEGORY	A	B	C	D
S-ILS 9R	868/18 200 (200-½)			
S-LOC 9R	1380/24 712 (700-½)	1380-1½ 712 (700-1%)		
YONUT FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 9R	1120/24 452 (500-½)	1120/45 452 (500-¾)		

