

WAAS CH 42804 W28A	APP CRS 273°	Rwy Ldg 13000 TDZE 651 Apt Elev 680
--	------------------------	--

RNAV (GPS) RWY 28R


CHICAGO O'HARE INTL (ORD)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. DME/DME RNP-0.3 NA. For inop ALSF-2, increase LNAV/VNAV all Cats visibility to 1½ mile and LNAV Cats C/D visibility to RVR 6000. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct DPA VOR/DME and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 132.7 348.0	124.125 GND CON (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	121.75 (TWR CENTER) (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC
--	--	------------------------------------	--	--	--------------------------	-------

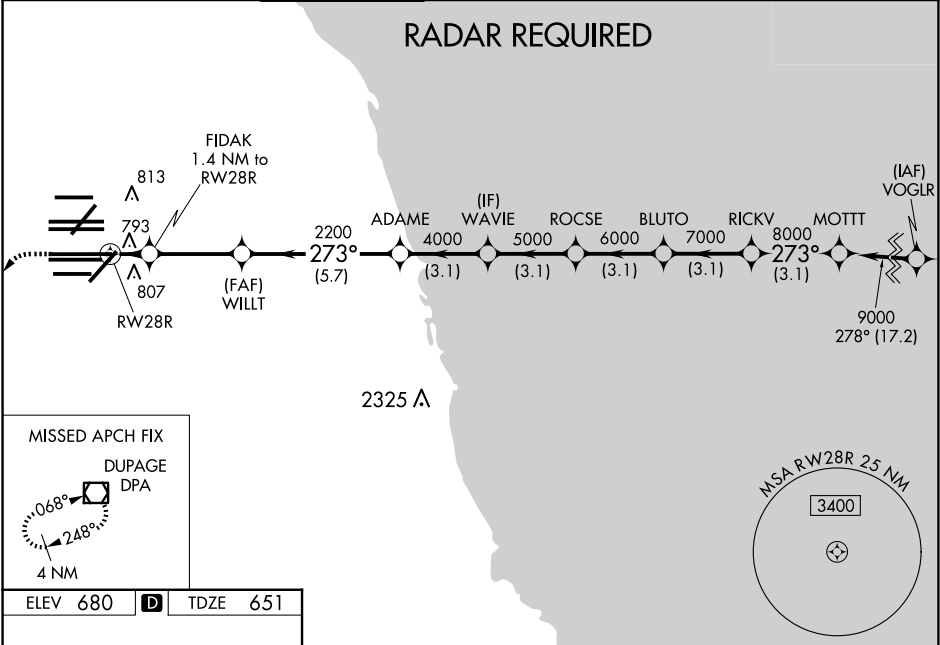

	*LNAV only.			
	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).			
	GP 3.00° TCH 54			
	CATEGORY A B C D			
	LPV DA 851/18 200 (200-½)			
HIRL all Rwy's TDZ/CL all Rwy's except 4L	LNAV/VNAV DA 1041/45 390 (400-¾)			
	LNAV MDA 1060/24 409 (400-½) 1060/40 409 (400-¾)			