


WAAS CH 58143 W09D	APP CRS 093°	Rwy Ldg TDZE Apt Elev	11245 673 680
--	------------------------	-----------------------------	--

RNAV (GPS) RWY 9C

CHICAGO O'HARE INTL (ORD)

RNP APCH.		ALSIF-2		MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct DEERE and hold.	
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all cats visibility to RVR 4500 and LNAV Cat C/D to 1% SM.					
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 121.15 348.0	GND CON (TWR NORTH) 124.125 (TWR SOUTH) 118.05 (ALL TWRs) 226.675	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6
			CPDLC		

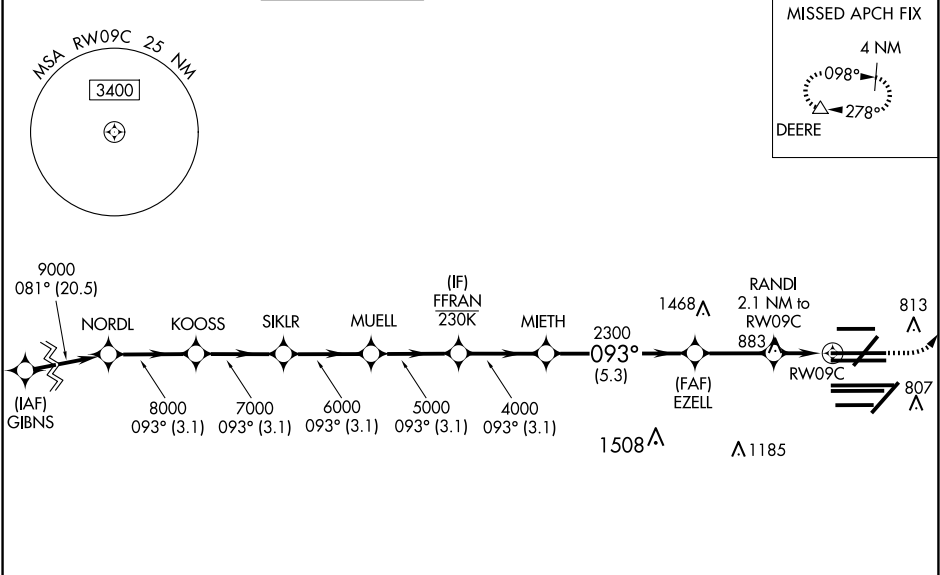

ELEV 680 TDZE 673	
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).	
*LNAV only.	
HIREL all Rwy's TDZ/CL all Rwy's except 4L	