


WAAS CH 99508 W09B	APP CRS 093°	Rwy Ldg 7500 TDZE 668 Apt Elev 680
--	------------------------	---

RNAV (GPS) RWY 9L

CHICAGO O'HARE INTL (ORD)

RADAR required for procedure entry. RNP APCH.				ALSf-2		MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct OBK VOR/DME and hold, continue climb-in-hold to 4000.	
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.							
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 128.15 348.0	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC	

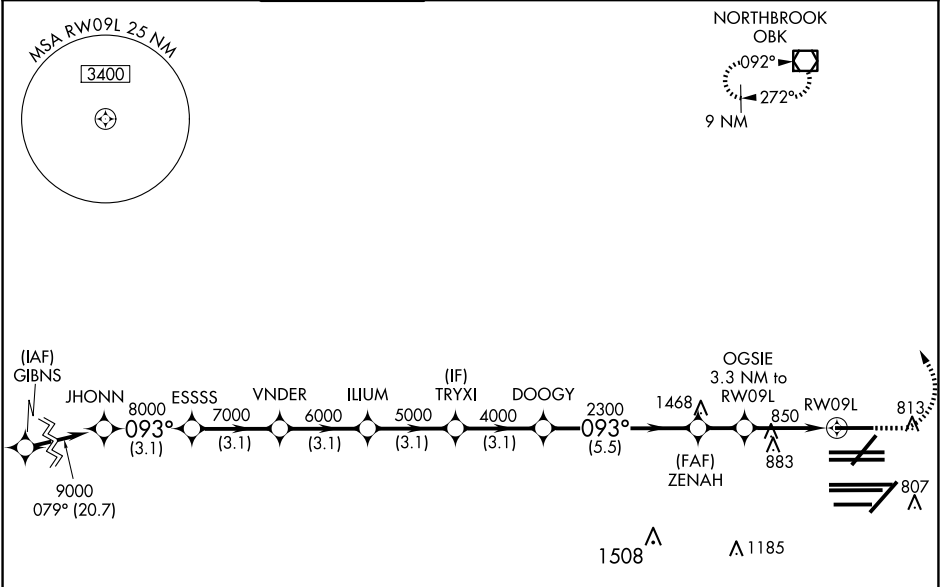

ELEV 680		TDZE 668	
JHONN		OGSIE 3.3 NM to RW09L	
ESSSS		RW09L	
VNDER		*1.2 NM to RW09L	
ILIUM		*1.2 NM to RW09L	
TRYXI		*1.2 NM to RW09L	
DOOGY		*1.2 NM to RW09L	
ZENAH		*1.2 NM to RW09L	
OGSIE		*1.2 NM to RW09L	
RW09L		*1.2 NM to RW09L	
GP 3.00° TCH 55		*1.2 NM to RW09L	
CATEGORY		D	
LPV DA		868/18 200 (200-½)	
LNAV/VNAV DA		1034/35 366 (400-¾)	
LNAV MDA		1100/24 432 (500-½) 1100/40 432 (500-¾)	