

WAAS CH 78239 W09A	APP CRS 092°	Rwy Idg TDZE Apt Elev	5001 631 631
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 9

GREENWOOD COUNTY (GRD)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Laurens altimeter setting. DME/DME RNP-0.3 NA. Circling Rwy 5, 23 NA at night. When local altimeter setting not received, use Laurens altimeter setting and increase LPV DA to 991 feet and visibility 1/8 SM all Cats, LNAV/VNAV DA to 1070 feet and visibility 1/4 SM all Cats, increase all MDA 60 feet, and LNAV Cat C/D visibility 1/8 SM and Circling Cat C/D visibility 1/4 SM. Rwy 9 helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:
Climb to 2500 direct
COBOT and hold.

ASOS 121.125	GREER APP CON★ 120.6 350.2	UNICOM 122.975 (CTAF) 0
------------------------	--------------------------------------	-----------------------------------

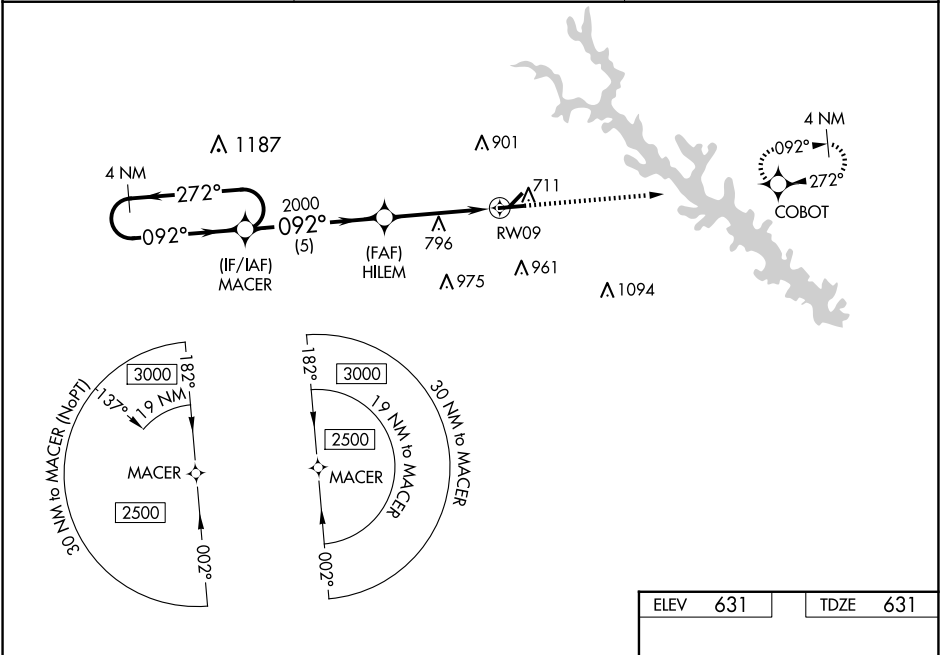

4 NM Holding Pattern		2500 COBOT		
GP 3.00° TCH 55		*LNAV only.		
2500		2000		
MACER		HILEM		
272°		092°		
092°		1.2 NM to RW09		
5 NM		3 NM		
1.2 NM		RW09		
CATEGORY	A	B	C	D
LPV DA	938-1 307 (400-1)			
LNAV/ VNAV DA	1017-1¼ 386 (400-1¼)			
LNAV MDA	1060-1 429 (500-1)		1060-1¼ 429 (500-1¼)	
CIRCLING	1080-1 449 (500-1)	1100-1 469 (500-1)	1320-2 689 (700-2)	1340-2¼ 709 (800-2¼)

ELEV 631 TDZE 631

3600 X 60

5001 X 100

690

0.3% UP

27

MIRL Rwy 9-27
REIL Rwy 9 and 27