


LOC/DME I-GQR	APP CRS	Rwy Ldg	4270
111.75	035°	TDZE	744
Chan 54(Y)		Apt Elev	757

ILS or LOC RWY 4

KANSAS CITY DOWNTOWN/WHEELER FLD (MKC)

DME or RADAR required for procedure entry. DME or RADAR required for LOC only.		MISSED APPROACH: Climb to 3100 then right turn heading 100° and on ANX VORTAC R-295 to ANX VORTAC and hold.
⚠ Circling NA east of Rwy 1-19. Autopilot coupled approach NA below 1013. ⚠ Circling NA to Rwy 22. Circling NA for Cat D to Rwy 4. Rwy 4 helicopter visibility reduction below RVR 4000 NA.		

ATIS 120.75	KANSAS CITY APP CON 118.4 307.35	DOWNTOWN TOWER 133.3 233.7	GND CON 121.9
-----------------------	--	--------------------------------------	-------------------------

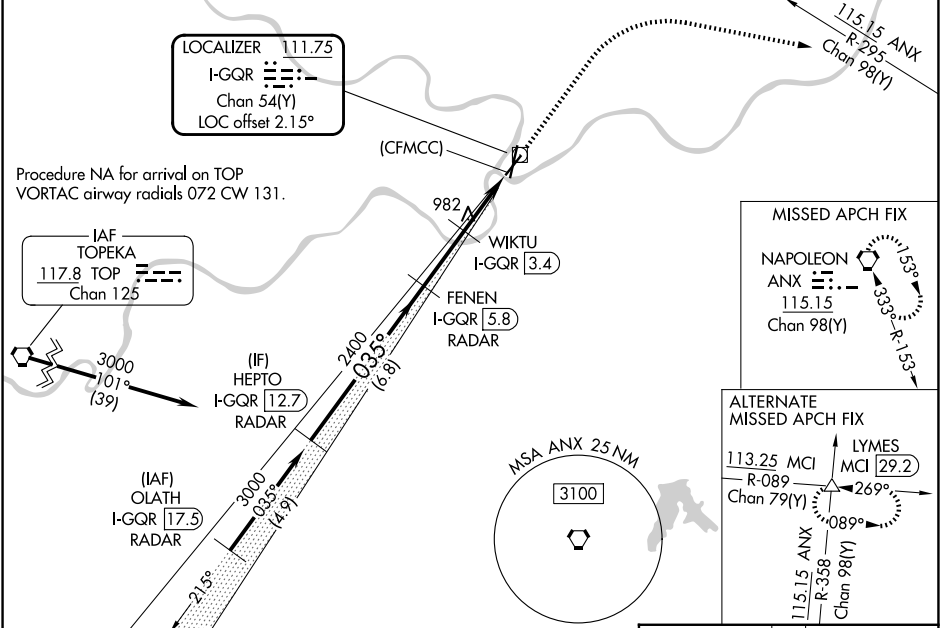

HEPTO I-GQR [12.7] RADAR		3100	ANX	ANX R-295
FENEN I-GQR [5.8] RADAR		2400	WIKTU I-GQR [3.4]	(CFMCC) I-GQR [0.8]
GS 3.00° TCH 52		3000	1560	
6.8 NM		2.4 NM	1.2 NM	1.4 NM
CATEGORY	A	B	C	D
S-ILS 4	1001/40 257 (300-¾)			NA
S-LOC 4	1560/55 816 (900-1)	1560-1¼ 816 (900-1¼)	1560-2½ 816 (900-2½)	NA
CIRCLING	1560-1 803 (900-1)	1560-1¼ 803 (900-1¼)	1560-2½ 803 (900-2½)	
WIKTU FIX MINIMUMS				
S-LOC 4	1240/55	496 (500-1)	1240-1⅜ 496 (500-1⅜)	NA
CIRCLING	1380-1 623 (700-1)	1400-1 643 (700-1)	1460-2 703 (800-2)	1540-2½ 783 (800-2½)

