



|            |         |          |      |
|------------|---------|----------|------|
| VORTAC LRD | APP CRS | Rwy Ldg  | 5927 |
| 117.4      | 139°    | TDZE     | 508  |
| Chan 121   |         | Apt Elev | 508  |

VOR or TACAN RWY 14  
LAREDO INTL (LRD)

**⚠** Circling NA west of Rwy 14 and 36L.  
**⚠** DME required.

MISSED APPROACH: Climb to 2500 direct LRD VORTAC and hold, continue climb-in-hold to 2500 (TACAN aircraft continue on LRD VORTAC R-132 to ELKOS/15 DME and hold SE, right turn, 312° inbound).

|                 |                               |                                        |                  |                  |
|-----------------|-------------------------------|----------------------------------------|------------------|------------------|
| ATIS<br>125.775 | HOUSTON CENTER<br>127.8 307.2 | LAREDO TOWER ★<br>120.1 (CTAF) 0 257.9 | GND CON<br>121.8 | UNICOM<br>122.95 |
|-----------------|-------------------------------|----------------------------------------|------------------|------------------|

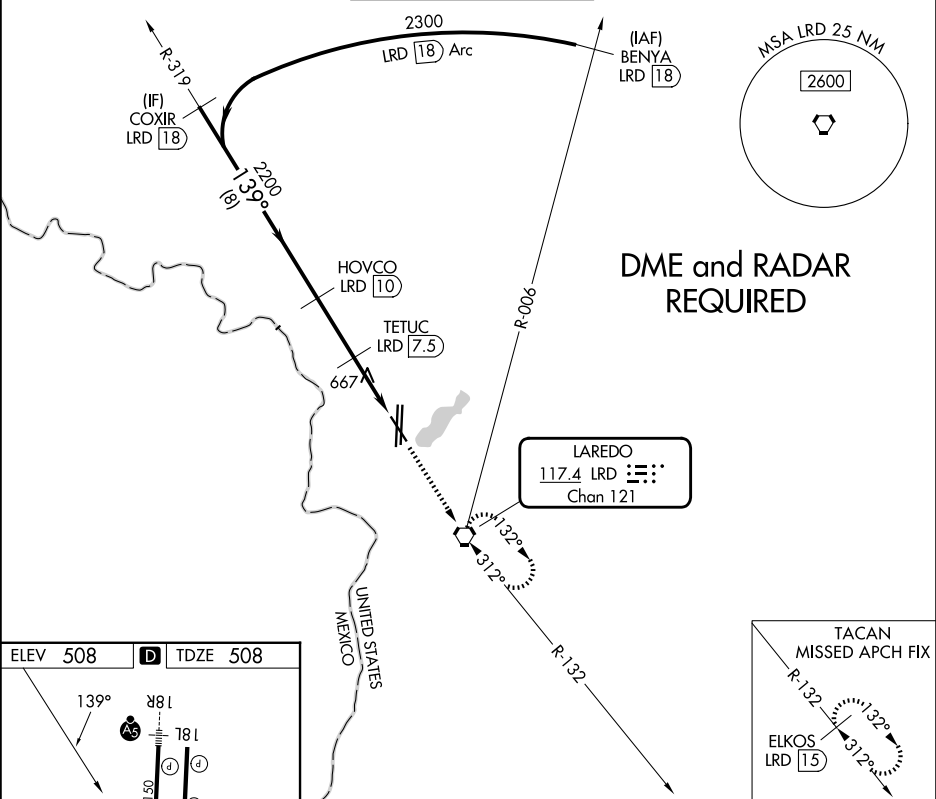

|          |                      |  |                      |  |                         |  |                         |  |                         |
|----------|----------------------|--|----------------------|--|-------------------------|--|-------------------------|--|-------------------------|
|          | COXIR LRD 18         |  | HOVCO LRD 10         |  | TETUC LRD 7.5           |  | LRD 6.1                 |  | LRD 5                   |
|          | 2300                 |  | 2200                 |  | 1280                    |  |                         |  |                         |
|          | 8 NM                 |  | 2.5 NM               |  | 1.4 NM                  |  | 1.1                     |  |                         |
| CATEGORY | A                    |  | B                    |  | C                       |  | D                       |  | E                       |
| S-14     | 920-1                |  | 412 (500-1)          |  | 920-1¼                  |  | 412 (500-1¼)            |  | 920-1½<br>412 (500-1½)  |
| CIRCLING | 940-1<br>432 (500-1) |  | 980-1<br>472 (500-1) |  | 1100-1½<br>592 (600-1½) |  | 1200-2¼<br>692 (700-2¼) |  | 1200-2½<br>692 (700-2½) |