

WAAS CH 63028 W27A	APP CRS 271°	Rwy Idg 5198 TDZE 430 Apt Elev 430
--	------------------------	---

RNAV (GPS) RWY 27

LAWRENCEVILLE-VINCENNES INTL (LWV)


▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Mount Carmel altimeter setting. When local altimeter setting not received, use Mount Carmel altimeter setting: increase LPV DA to 706 feet; increase LNAV/VNAV DA to 858 feet and all visibilities ½ SM; increase all MDAs 40 feet and Circling visibility Cat D ½ SM. Inop table does not apply to LNAV Cat C. For inop ODALS increase LNAV/VNAV all Cats visibility to 1½ miles. For inop ODALS when using Mount Carmel altimeter setting increase LPV all Cats visibility to ¾ mile, LNAV/VNAV all Cats visibility to 1½ miles and LNAV Cats C and D visibility to 1½ miles. Circling to Rwy 36 NA at night.

ODA




MISSED APPROACH:
Climb to 2600 direct
ZUSPU and hold.

ASOS 118.0	EVANSVILLE APP CON ★ 125.6 343.7	UNICOM 122.8 (CTAF) L
---------------	-------------------------------------	--------------------------

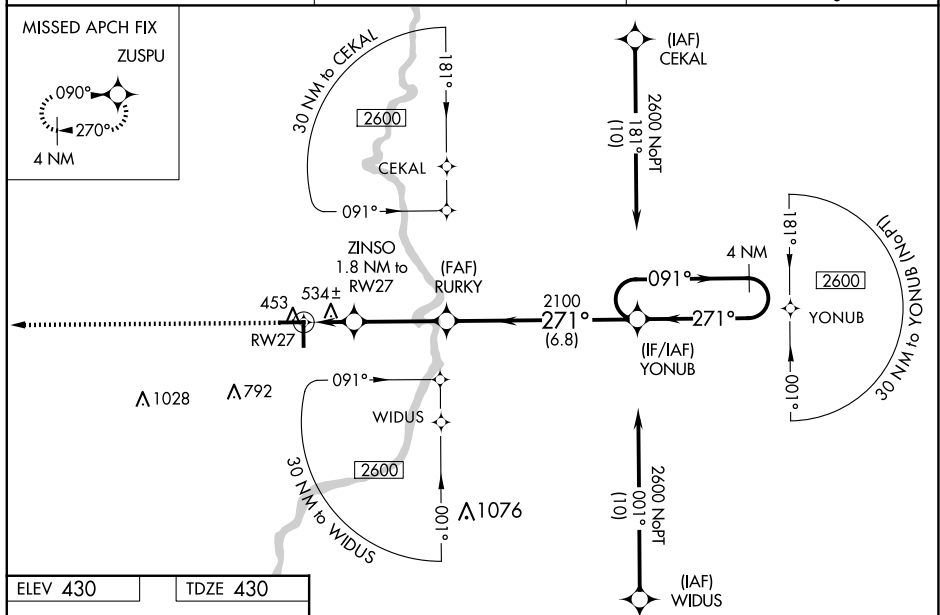

ELEV 430		TDZE 430
----------	--	----------

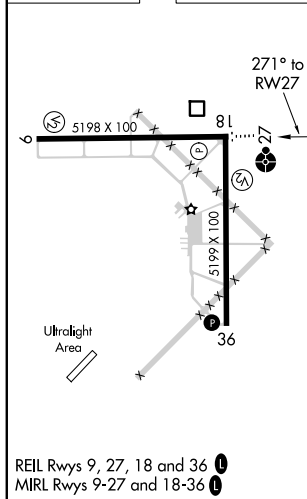

2600 ZUSPU VGSJ and RNAV glidepath not coincident (VGSJ Angle 3.00/TCH 26).

*LNAV only.

1.1 NM to RW27

1.8 NM to RW27

2100

271°

091° → 2600

← 271°

*1040

2100

GP 3.00° TCH 45

1.1 NM 0.7 3.3 NM 6.8 NM

CATEGORY	A	B	C	D
LPV DA	680-3/4	250 (300-3/4)		
LNAV/ VNAV DA	832-1 1/4	402 (500-1 1/4)		
LNAV MDA	800-3/4 370 (400-3/4)	800-1 370 (400-1)		
CIRCLING	880-1 450 (500-1)	900-1 470 (500-1)	940-1 1/2 510 (600-1 1/2)	1160-2 1/4 730 (800-2 1/4)

RNAV (GPS) RWY 27