

WAAS CH 93728 W09A	APP CRS 090°	Rwy ldg 5198 TDZE 428 Apt Elev 430
--	------------------------	---

RNAV (GPS) RWY 9


LAWRENCEVILLE-VINCENNES INTL (LWV)

⚠

Baro-VNAV NA when using Mount Carmel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Mount Carmel altimeter setting: increase LPV DA to 704 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 855 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat D ¼ SM. Circling to Rwy 36 NA at night.

MISSED APPROACH:
Climb to 2600 direct YONUB and hold.

ASOS 118.0	EVANSVILLE APP CON ★ 125.6 343.7	UNICOM 122.8 (CTAF) 0
----------------------	--	---------------------------------

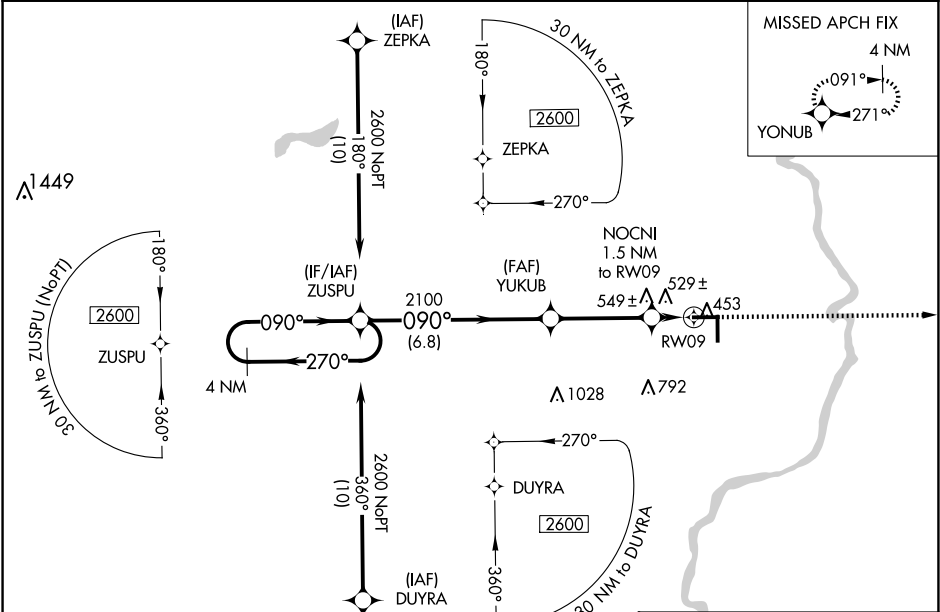

4 NM Holding Pattern

2600 ← 270°

090° →

GP 3.00° TCH 45

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 26).

ZUSPU

YUKUB

NOCNI 1.5 NM to RW09

RW09

*LNAV only

*940

6.8 NM

3.6 NM

1.5 NM

ELEV 430

TDZE 428

YONUB

090° to RW09

5198 X 100

81

27

5199 X 100

36

Ultralight Area

CATEGORY	A	B	C	D
LPV DA		678-¾	250 (300-¾)	
LNAV/VNAV DA		829-1¾	401 (400-1¾)	
LNAV MDA	820-1	392 (400-1)	820-1½	392 (400-1½)
CIRCLING	880-1 450 (500-1)	900-1 470 (500-1)	940-1½ 510 (600-1½)	1160-2¼ 730 (800-2¼)

REIL Rwy 9, 27, 18 and 36 0
MIRL Rwy 9-27 and 18-36 0