

HI-VOR/DME or TACAN RWY 36

VORTAC LNK 116.1 Chan 108	APCH CRS 360°	Rwy Idg 12,901 TDZE 1175 Arpt Elev 1219
---	-------------------------	--

[USAF]

LINCOLN (KLNK)

RADAR required




MISSED APPROACH: Climb to 3000 direct LNK VORTAC then via LNK R-360 to BUMBE 12 DME and hold.

▼ * When ALS inop, increase CAT E vis to 1½ miles.
** When ALS inop, increase CAT CDE vis to 1½ miles.


ATIS 118.05 290.9	OMAHA APP CON 124.0 270.3	TOWER ★ 118.5 253.5	GND CON 121.9 275.8	CLNC DEL 120.7 225.4
-----------------------------	-------------------------------------	-------------------------------	-------------------------------	--------------------------------

Inoperative table does not apply.


When local altimeter setting not received use Beatrice altimeter setting.

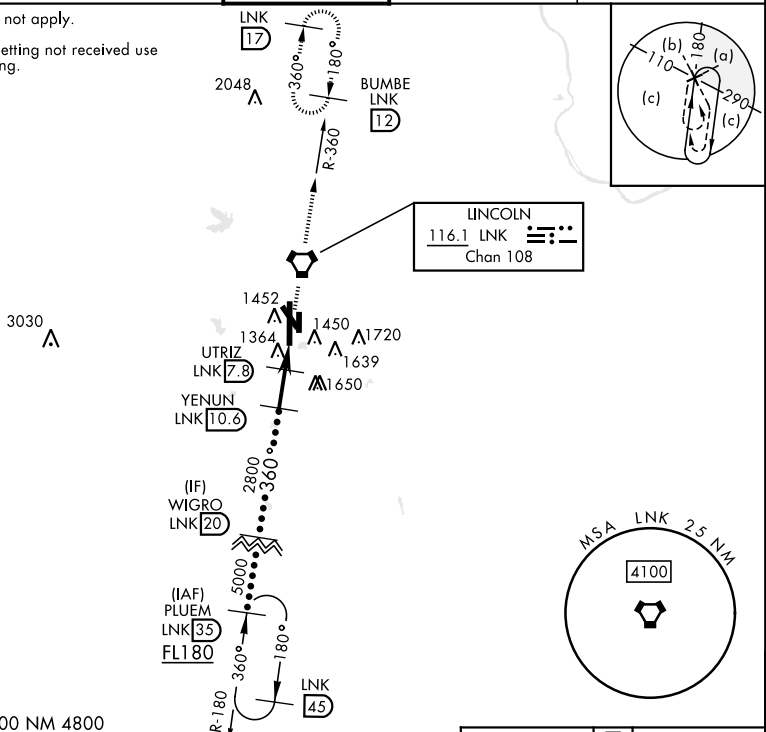

EMERG SAFE ALT 100 NM 4800

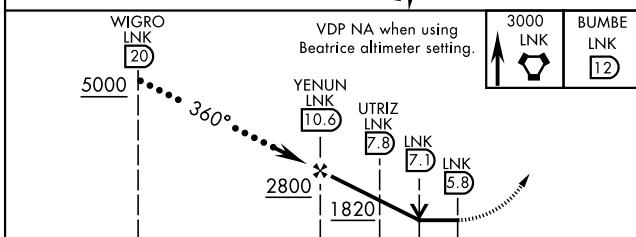

ELEV	1219	TDZE	1175
------	------	------	------

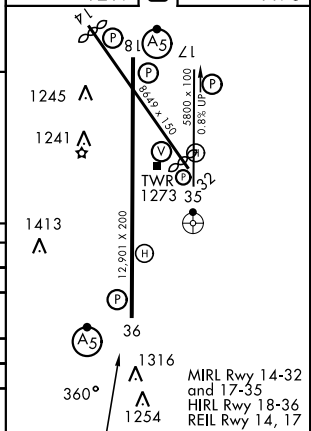

HI-VOR/DME or TACAN RWY 36