

WAAS CH 69603 W07B	APP CRS 071°	Rwy Ldg 11095 TDZE 128 Apt Elev 128
---------------------------------	------------------------	--

RNAV (GPS) Y RWY 7R


LOS ANGELES INTL (LAX)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C (41°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct ESINE and on track 071° to DOWNE and hold.

D-ATIS 133.8	SOCAL APP CON 124.3 363.2 (APCH from W) 124.9 269.0 (090°-224°) 124.5 235.975 (225°-044°) 128.5 360.7 (045°-089°)	LOS ANGELES TOWER 133.9 239.3 (N) 120.95 379.1 (S)	GND CON 121.65 327.0 (N) 121.75 327.0 (S) 121.4 327.0 (W)
------------------------	--	---	---

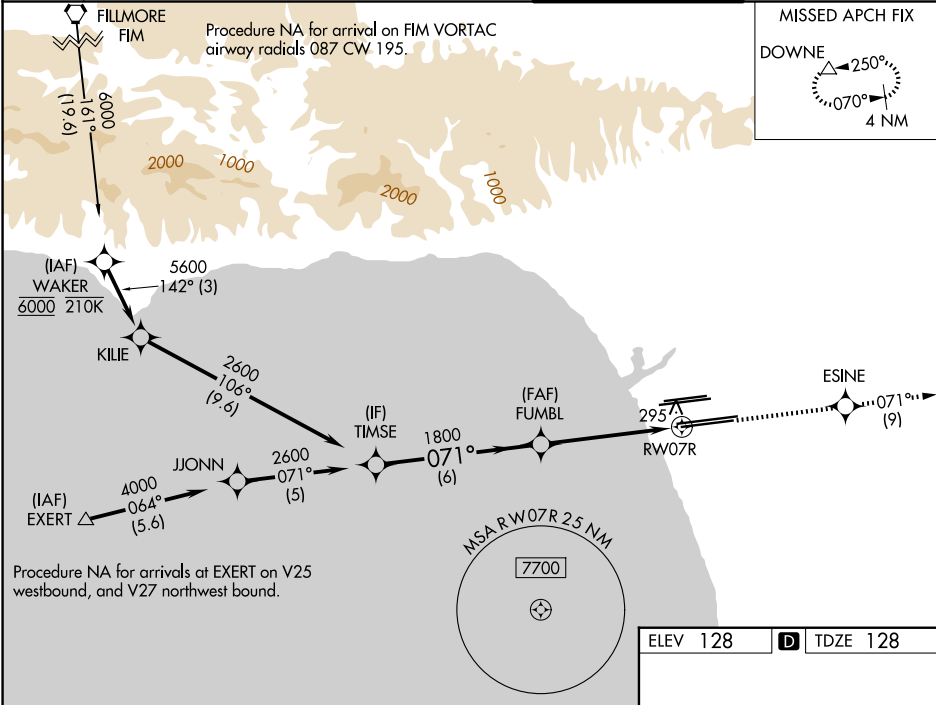

3000 ESINE tr 071° DOWNE

* LNAV only

GP 3.00°
TCH 60

6 NM 3.9 NM 1.2

CATEGORY A B C D

LPV DA# 328/24 200 (200-½)

LNAV/VNAV DA 462/30 334 (400-⅝)

LNAV MDA 560/24 432 (500-½) 560/40 432 (500-¾)

TDZ/CL Rwy 6R, 7L, 24R, and 25L
HIRL all Rwy