

LOC I-LKS 109.1	APP CRS 297°	Rwy Ldg TDZE 480 Apt Elev 501
---------------------------	------------------------	---

LOC RWY 29

LOUISVILLE MUHAMMAD ALI INTL (SDF')

RADAR required. ADF or DME required.


⚠

Circling Rwy 11 NA at night. Rwy 29 helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase S-29 visibility Cats A/B to RVR 5500 and Cats C/D to 1½ SM.

MAISR

MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 heading 268° and on ILL VORTAC R-279 to DAMEN and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
--------------------------	--	--	-------------------------------

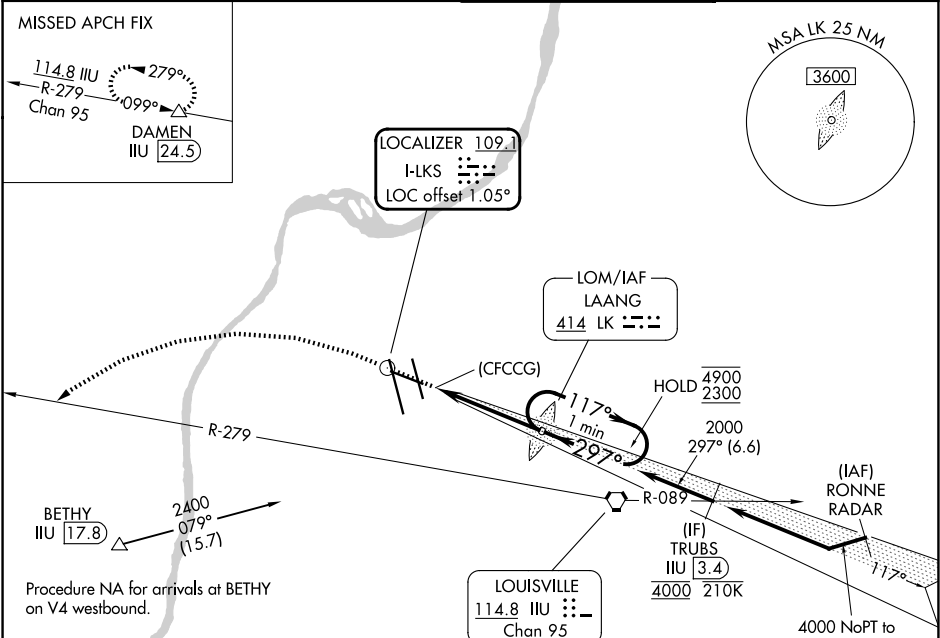

ELEV 501 **D** TDZE 480

FAF to MAP 4.1 NM

Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22

TRUBS
 252° (1.2) and
 297° (4.7)

VGSI and descent angles not coincident
 (VGSI Angle 3.00/TCH 56).

LAANG
 LK LOM

One Minute
 Holding Pattern

CATEGORY	A	B	C	D
S-29	1060/40	580 (600-¾)	1060-1¼	580 (600-1¼)
CIRCLING	1060-1 559 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)

SE-1, 22 JAN 2026 to 19 FEB 2026

SE-1, 22 JAN 2026 to 19 FEB 2026