

LOUISVILLE, KENTUCKY

AL-239 (FAA)

25331

WAAS CH 57909 W17A	APP CRS 170°	Rwy Ldg 10000 TDZE 485 Apt Elev 501
--	------------------------	--

RNAV (GPS) Y RWY 17R
LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP APCH - GPS.




▼ Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.
▲ Use of FD or AP required during simultaneous operations. Circling Rwy 11 NA at night.
 For unconsolidated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C.
 For inop ALS, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to RVR 6000.

MALSR



MISSED APPROACH:
Climb to 1600 then
climbing right turn to
4000 direct DAMEN
and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
-------------------	-------------------------------------	---------------------------------	------------------------

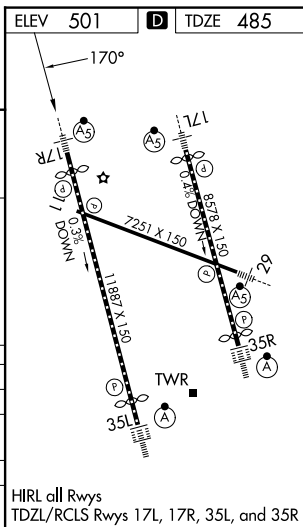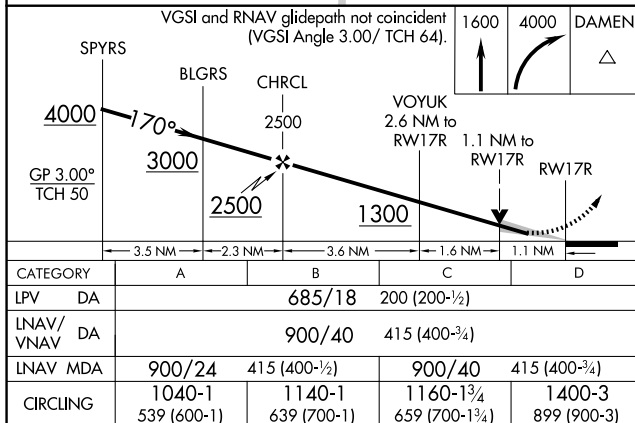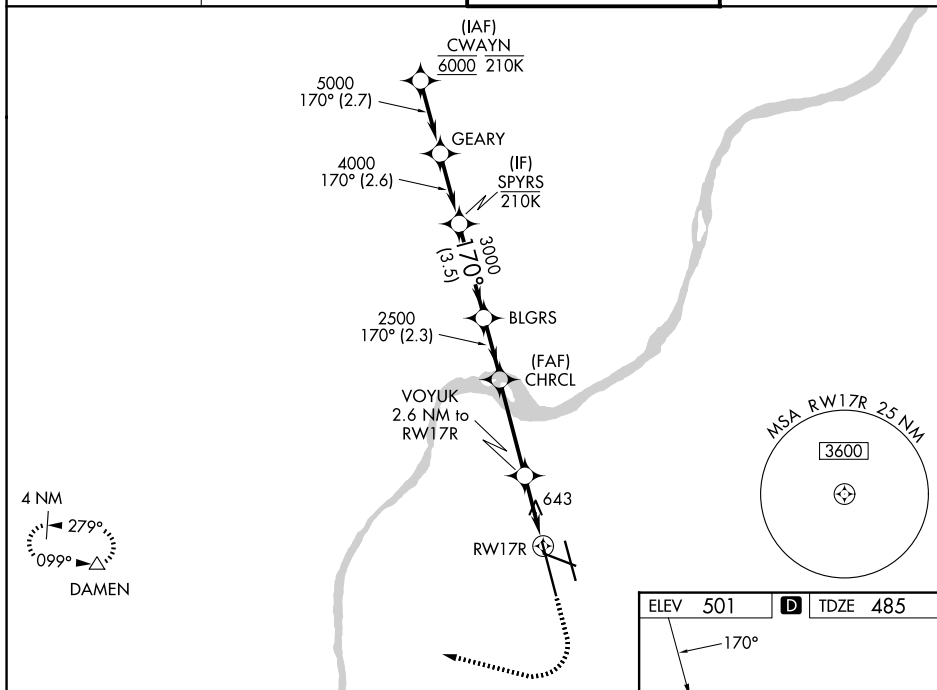

LOUISVILLE, KENTUCKY

Amdt 2 11JUL24

38°10'N-85°44'W

LOUISVILLE MUHAMMAD ALI INTL (SDF)
RNAV (GPS) Y RWY 17R