

MIAMI, FLORIDA

AL-256 (FAA)

25219

WAAS CH 53644 W30A	APP CRS 308°	Rwy Ldg TDZE Apt Elev	6800 8 8
--	------------------------	-----------------------------	-------------------------------------


RNAV (GPS) RWY 30
MIAMI-OPA LOCKA EXEC (OPF')

RNP APCH - GPS.


Baro-VNAV and VDP NA when using Miami Intl altimeter setting.
Rwy 30 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 7°C or above 54°C. When local altimeter setting not received, use Miami Intl altimeter setting: increase LPV DA to 276 feet and all visibilities 1/8 SM; increase LNAV/VNAV DA to 438 feet and all visibilities 1/8 SM; increase all MDAs 20 feet and LNAV visibility Cat C/D 1/8 SM and Circling visibility Cat D 1/4 SM.

MISSED APPROACH: Climb to 800 then climbing right turn to 3000 direct HOWHS and hold, continue climb-in-hold to 3000.

ATIS 125.9	MIAMI APP CON 128.6 306.975	OPA LOCKA TOWER ★ 134.675 (CTAF) 0	GND CON 120.025	CLNC DEL 119.2	GCO 119.45
----------------------	---------------------------------------	--	---------------------------	--------------------------	----------------------

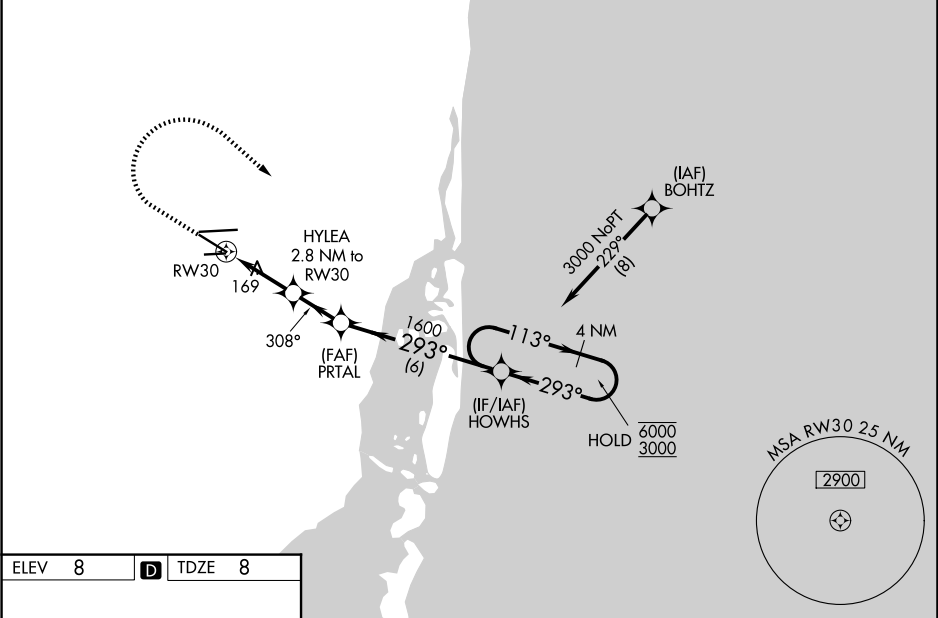

ELEV 8	D	TDZE 8
---------------	----------	---------------

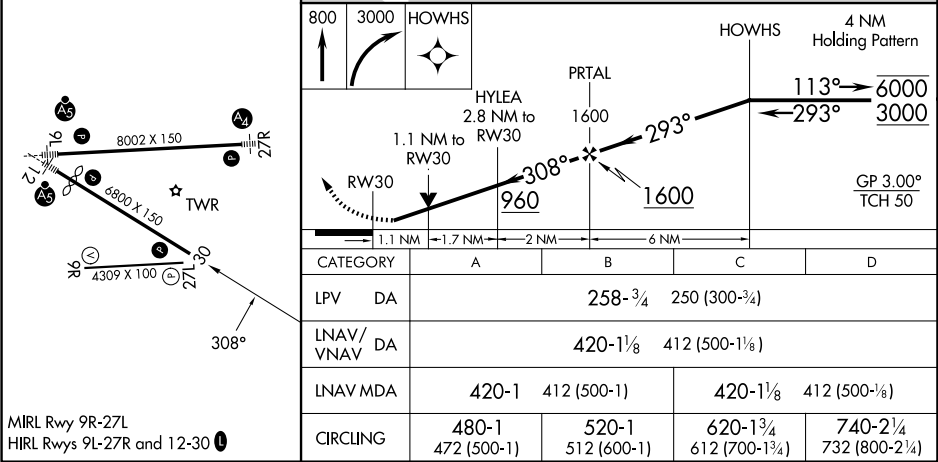

MIAMI, FLORIDA
Orig 03NOV22

25°54'N-80°17'W

MIAMI-OPA LOCKA EXEC (OPF')
RNAV (GPS) RWY 30

SE-3, 22 JAN 2026 to 19 FEB 2026

SE-3, 22 JAN 2026 to 19 FEB 2026