

MIAMI, FLORIDA

AL-257 (FAA)

26022

APP CRS 272°	Rwy Ldg	12755
	TDZE	9
	Apt Elev	9

RNAV (RNP) Z RWY 27

MIAMI INTL (MIA)

RNP AR APCH-GPS.




MALSR



MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 8°C or above 54°C. For inop ALS, increase RNP 0.11 visibility to RVR 4500 all Cats.

D-ATIS 119.15	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 348.6 127.5 (9/27/30)
-------------------------	--------------------------------------	-----------------------------------	---

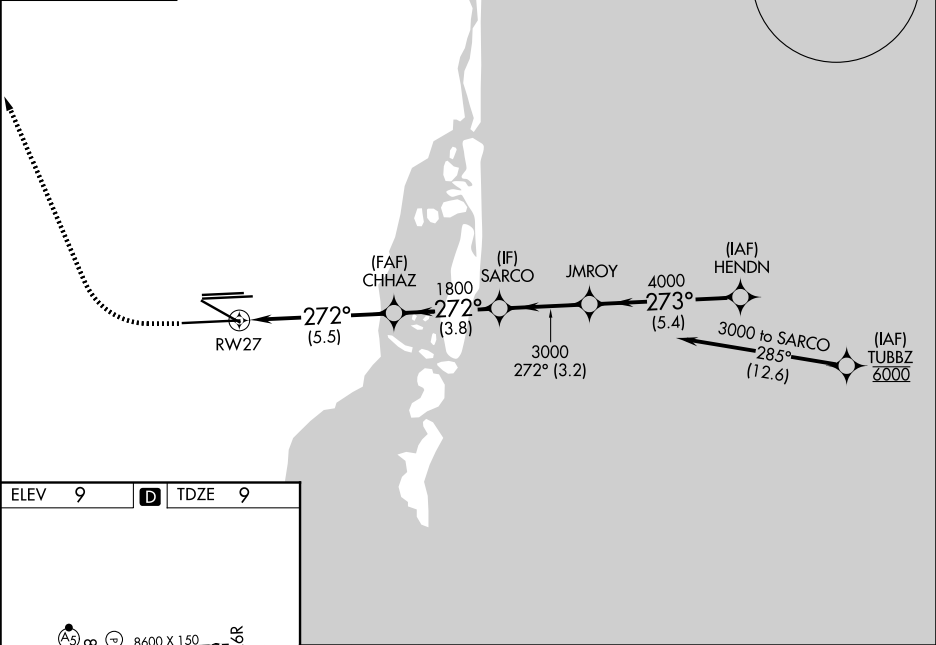

ELEV 9 TDZE 9

TDZ/CL Rwy 8R
REIL Rwy 8L and 26R
HIRL all Rwy

CATEGORY	A	B	C	D
RNP 0.11 DA	327/24 318 (400-½)			
RNP 0.30 DA	405/35 396 (400-¾)			

AUTHORIZATION REQUIRED

MIAMI, FLORIDA
Amdt 3 12AUG21

25°48'N-80°17'W

MIAMI INTL (MIA)
RNAV (RNP) Z RWY 27

SE-3, 22 JAN 2026 to 19 FEB 2026

SE-3, 22 JAN 2026 to 19 FEB 2026