

WAAS CH 56240 W31A	APP CRS 306°	Rwy Ldg TDZE 2627 Apt Elev 2634
--	------------------------	---

RNAV (GPS) RWY 31


FRANK WILEY FLD (MLS)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 54°C.

MISSED APPROACH: Climb to 6000 direct EGITE and hold, continue climb-in-hold to 6000.

ASOS 135.575	SALT LAKE CENTER 126.85 305.2	UNICOM 123.0 (CTAF) 1
------------------------	---	---------------------------------

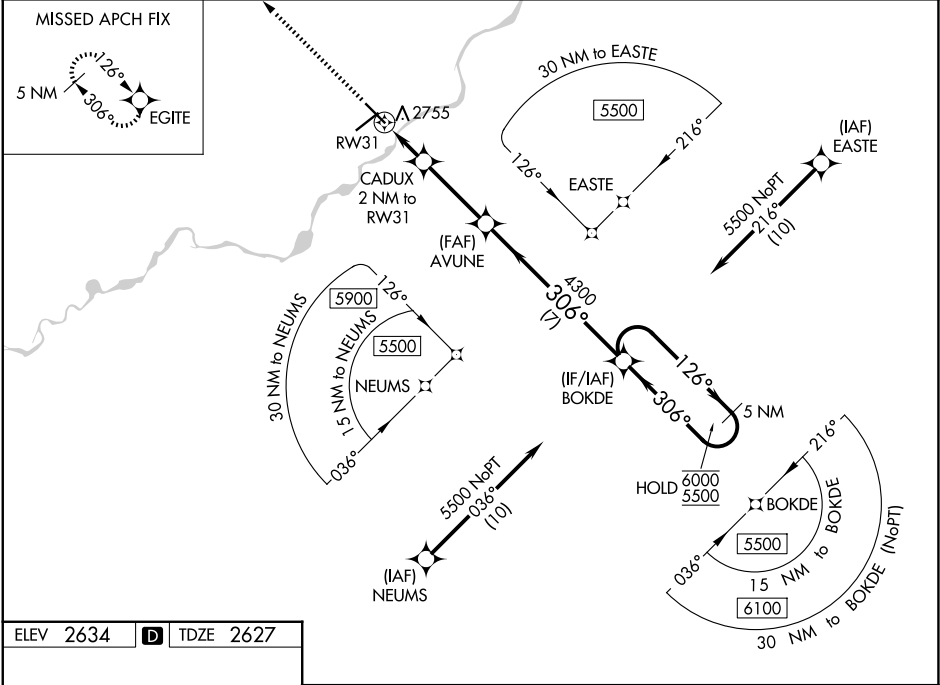

ELEV 2634 D TDZE 2627

The chart displays the RNAV (GPS) RWY 31 approach for Miles City, Montana. It includes the missed approach procedure starting from the missed approach fix (EGITE) and climbing to 6000 feet. The enroute section shows the approach path from the NEUMS (IAF) and BOKDE (IF/IAF) fixes, passing through CADUX and AVUNE, to the runway. Holding patterns are shown for BOKDE and EGITE. The chart also includes a diagram of the missed approach fix (EGITE) and a diagram of the enroute section showing the approach path from the NEUMS (IAF) and BOKDE (IF/IAF) fixes, passing through CADUX and AVUNE, to the runway.

CATEGORY	A	B	C	D
LPV	DA	2877-1	250 (300-1)	
LNAV/VNAV	DA	2917-1	290 (300-1)	
LNAV	MDA	3020-1	393 (400-1)	3020-1½ 393 (400-1½)
CIRCLING	3060-1 426 (500-1)	3100-1 466 (500-1)	3160-1½ 526 (600-1½)	3320-2¼ 686 (700-2¼)