


|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Ldg  | 9501 |
| 117°    | TDZE     | 3200 |
|         | Apt Elev | 3206 |

RNAV (RNP) Z RWY 12

MISSOULA MONTANA (MISO)

|              |                                                                                                                                                                                  |       |  |                                                                                                                                                                                                                                                                                                                                       |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RNP AR APCH. |                                                                                                                                                                                  | MALSR |  | MISSED APPROACH: Climb to 13000 on track 117° to OKASE and on track 123° to TAGOE and hold, continue climb-in-hold to 13000.<br>*Missed approach requires minimum climb of 350 feet per NM to 8300; if unable to meet climb gradient, see RNAV (GPS) Y RWY 12.<br>#Missed approach requires minimum climb of 425 feet per NM to 8300. |
|              | For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21° C (-6°F) or above 43°C (109°F).                                                                                     |       |  |                                                                                                                                                                                                                                                                                                                                       |
|              | For inop ALS, increase RNP 0.12 all Cats visibility to RVR 6000. For inop ALS, increase RNP 0.30 all Cats visibility to 2½ SM.<br>When local weather not received, procedure NA. |       |  |                                                                                                                                                                                                                                                                                                                                       |

|        |                   |                        |         |        |
|--------|-------------------|------------------------|---------|--------|
| ATIS   | SPOKANE APP CON * | MISSOULA TOWER *       | GND CON | UNICOM |
| 126.65 | 124.9 298.95      | 118.4 (CTAF) 0 377.175 | 121.9   | 122.95 |

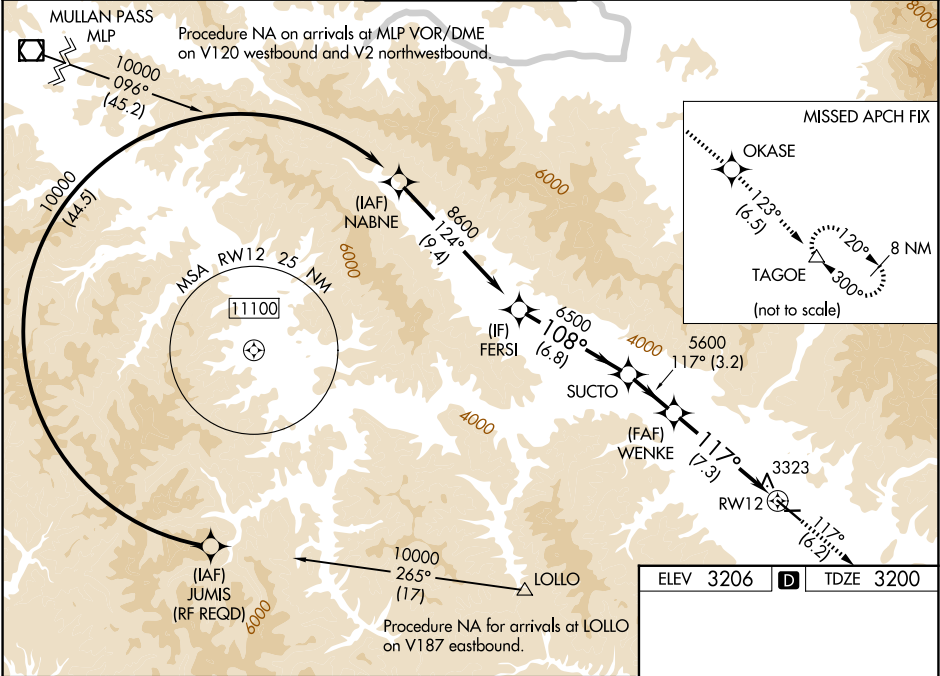

|                                                                     |  |                       |            |         |            |  |  |
|---------------------------------------------------------------------|--|-----------------------|------------|---------|------------|--|--|
| VGSI and RNAV glidepath not coincident<br>(VGSI Angle 3.00/TCH 55). |  | 13000<br>↑<br>tr 117° | OKASE<br>✧ | tr 123° | TAGOE<br>△ |  |  |
|---------------------------------------------------------------------|--|-----------------------|------------|---------|------------|--|--|

NW-1, 22 JAN 2026 to 19 FEB 2026

NW-1, 22 JAN 2026 to 19 FEB 2026