


WAAS CH 69306 W33A	APP CRS 327°	Rwy Ldg TDZE 219 Apt Elev 219
--	------------------------	---

RNAV (GPS) RWY 33

MOBILE RGNL (MOB)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 700 then climbing left turn to 2000 direct SQWID and hold.	
ASR	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cots visibility to RVR 4500. * RVR 1800 authorized with use of FD or AP or HUD to DA.			
ATIS	MOBILE APP CON ★	MOBILE TOWER ★	GND CON	UNICOM
124.75 257.85	118.5 269.3	118.3 (CTAF) 239.0	121.9 348.6	122.95

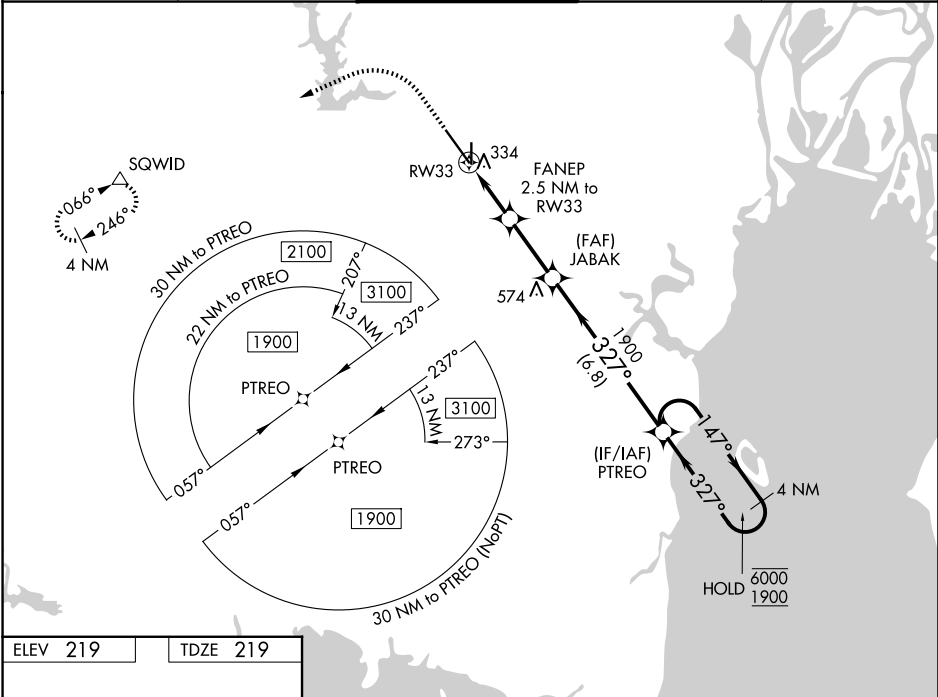

ELEV 219	TDZE 219	700 2000 SQWID				VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 50).			
		JABAK 1900		PTREO 1900		4 NM Holding Pattern			
		FANEP 2.5 NM to RW33		1060		GP 3.00° TCH 57			
CATEGORY		A		B		C		D	
LPV DA *		419/24		200 (200-½)					
LNAV/VNAV DA		505/24		286 (300-½)					
LNAV MDA		600/24		381 (400-½)		600/35		381 (400-¾)	
CIRCLING		680-1		461 (500-1)		740-1½ 521 (600-1½)		780-2 561 (600-2)	