


LOC I-MLU	APP CRS	Rwy Ldg	7504
109.5	042°	TDZE	78
		Apt Elev	79

ILS or LOC RWY 4
MONROE RGNL (MLU)

ADF or DME required for procedure entry.			MALSR	MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold.
Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 4 Cat C/D visibility to 1½ SM. UXGOY FIX MINIMUMS: For inop ALS, increase S-LOC 4 Cat C/D visibility to RVR 5500. ASR **RVR 1800 authorized with the use of FD or AP or HUD to DA. # DME from MLU VORTAC.				
ATIS	MONROE APP CON *	MONROE TOWER *	GND CON	UNICOM
125.05	118.15 290.475	118.9(CTAF) 0 257.8	121.9	122.95

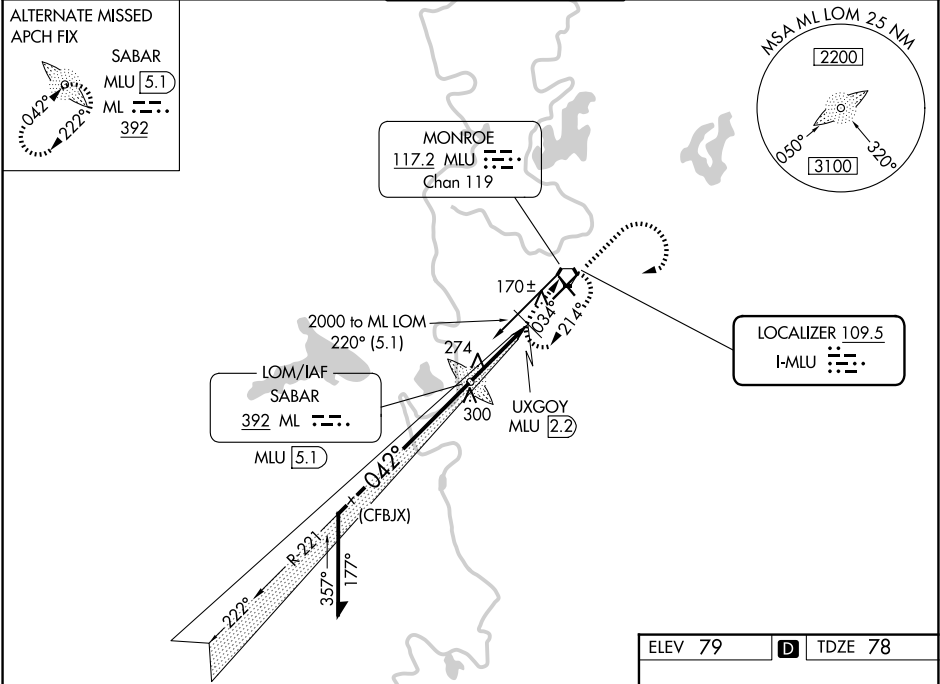

Remain within 10 NM 2000 042° GS 3.00° TCH 50		ML LOM MLU 5.1 1483 1500 *540	1800 3000 MLU UXGOY MLU 2.2 * LOC only.	
		2.9 NM 1.3 NM		
CATEGORY	A	B	C	D
S-ILS 4	**278/24 200 (200-½)			
S-LOC 4	540/24	462 (500-½)	540/50	462 (500-1)
CIRCLING	580-1	501 (600-1)	740-1¾ 661(700-1¾)	1160-3 1081 (1100-3)
# UXGOY FIX MINIMUMS				
S-LOC 4	420/24	342 (400-½)	420/30	342 (400-¾)
CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)

