

WAAS CH 70510 W22A	APP CRS 222°	Rwy Ldg TDZE 78 Apt Elev 79
--	------------------------	---

RNAV (GPS) RWY 22
MONROE RGNL (MLU)

RNP APCH.


 Circling Rwy 14 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM.

MALSR





MISSED APPROACH: Climb to 3000 direct KUYRE and hold, continue climb-in-hold to 3000.

ATIS 125.05	MONROE APP CON ★ 118.15 290.475	MONROE TOWER ★ 118.9 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

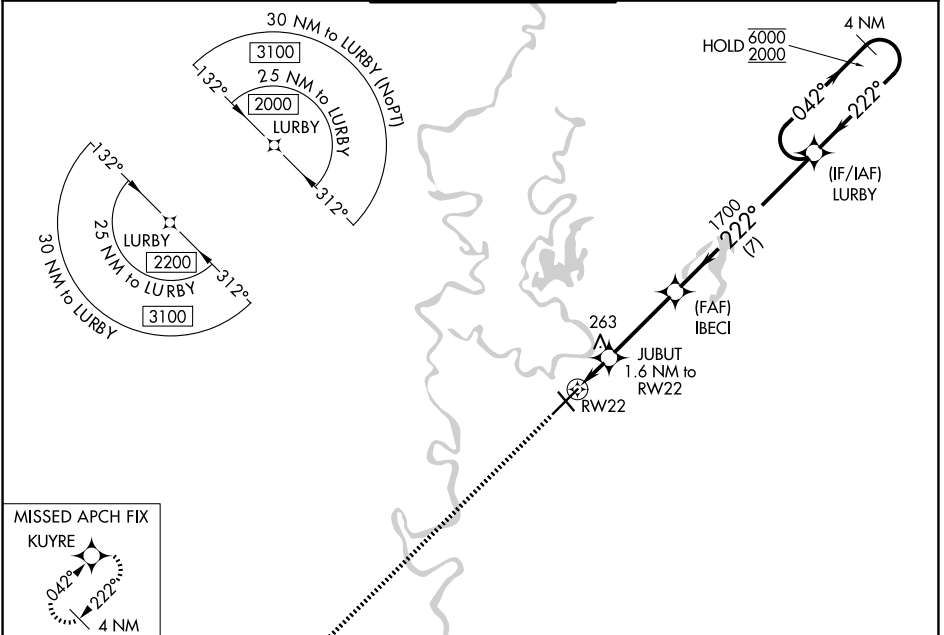

ELEV 79	D	TDZE 78
----------------	----------	----------------

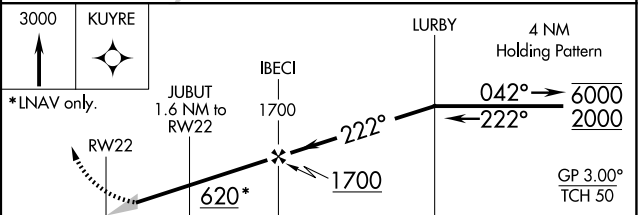

CATEGORY	A	B	C	D
LPV DA		278-½	200 (200-½)	
LNAV/VNAV DA		534-1	456 (500-1)	
LNAV MDA	520-½	442 (500-½)	520-⅞	442 (500-⅞)
CIRCLING	540-1 461 (500-1)	580-1 501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)

REIL Rwy 14 and 32
MIRL Rwy 14-32 0
HIRL Rwy 4-22 0