

VORTAC MLU	APP CRS	Rwy Ldg
117.2	236°	7504
Chan 119		TDZE 78
		Apt Elev 79

VOR RWY 22
MONROE RGNL (MLU)


DME required.

Circling Rwy 14 NA at night. Rwy 22 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For inop ALS, increase S-22 Cat A/B ASR visibility to 1 SM, and Cat C/D to $1\frac{1}{2}$ SM.

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold, continue climb-in-hold to 3000.

ATIS 125.05	MONROE APP CON★ 118.15 290.475	MONROE TOWER★ 118.9 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

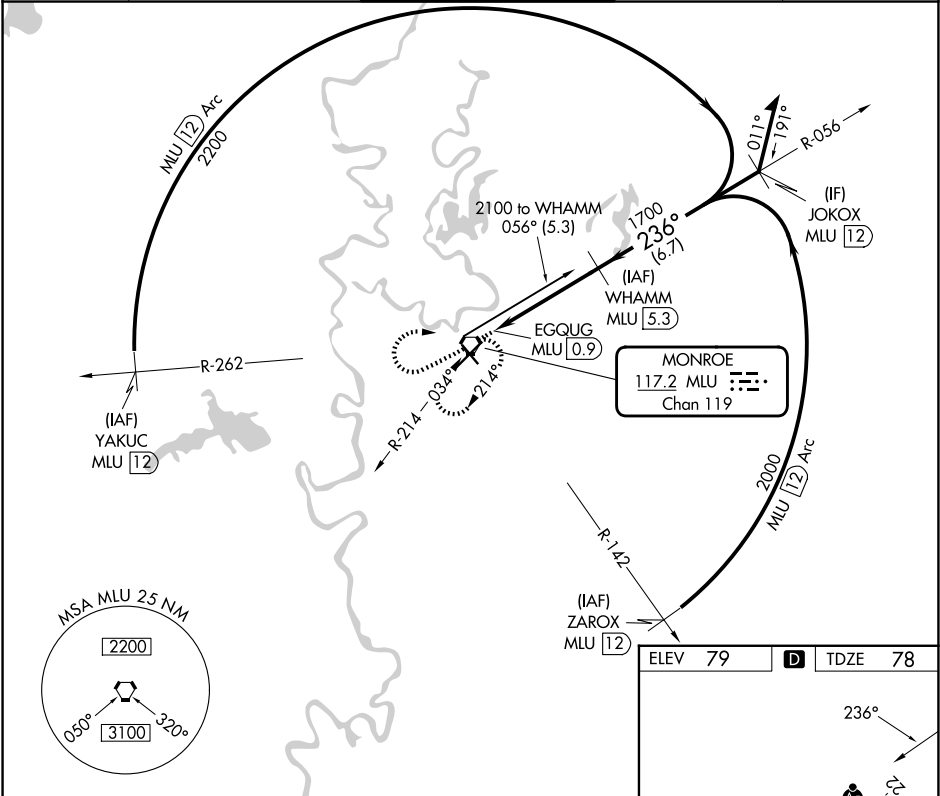

Remain within 10 NM

056°

2100

236°

1700

≤ 3.00°

TCH 50

0.5 → 0.9 → 3.6 NM

CATEGORY	A	B	C	D
S-22	560-3/4 482 (500-3/4)		560-1 482 (500-1)	
CIRCLING	560-1 481 (500-1)	580-1 501 (600-1)	740-1 3/4 661 (700-1 3/4)	1160-3 1081 (1100-3)

REIL Rwy 14 and 32
MIRL Rwy 14-32 0
HIRL Rwy 4-22 0

SC-4, 22 JAN 2026 to 19 FEB 2026

SC-4, 22 JAN 2026 to 19 FEB 2026