


CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

SAID in use. Operate transponders
with altitude reporting mode and ADS-B
(if equipped) enabled on all airport surfaces.

D-ATIS
135.1
NASHVILLE TOWER
118.6 257.8
GND CON
121.9 348.6
CLNC DEL
126.05
CPDLC
PDC
D

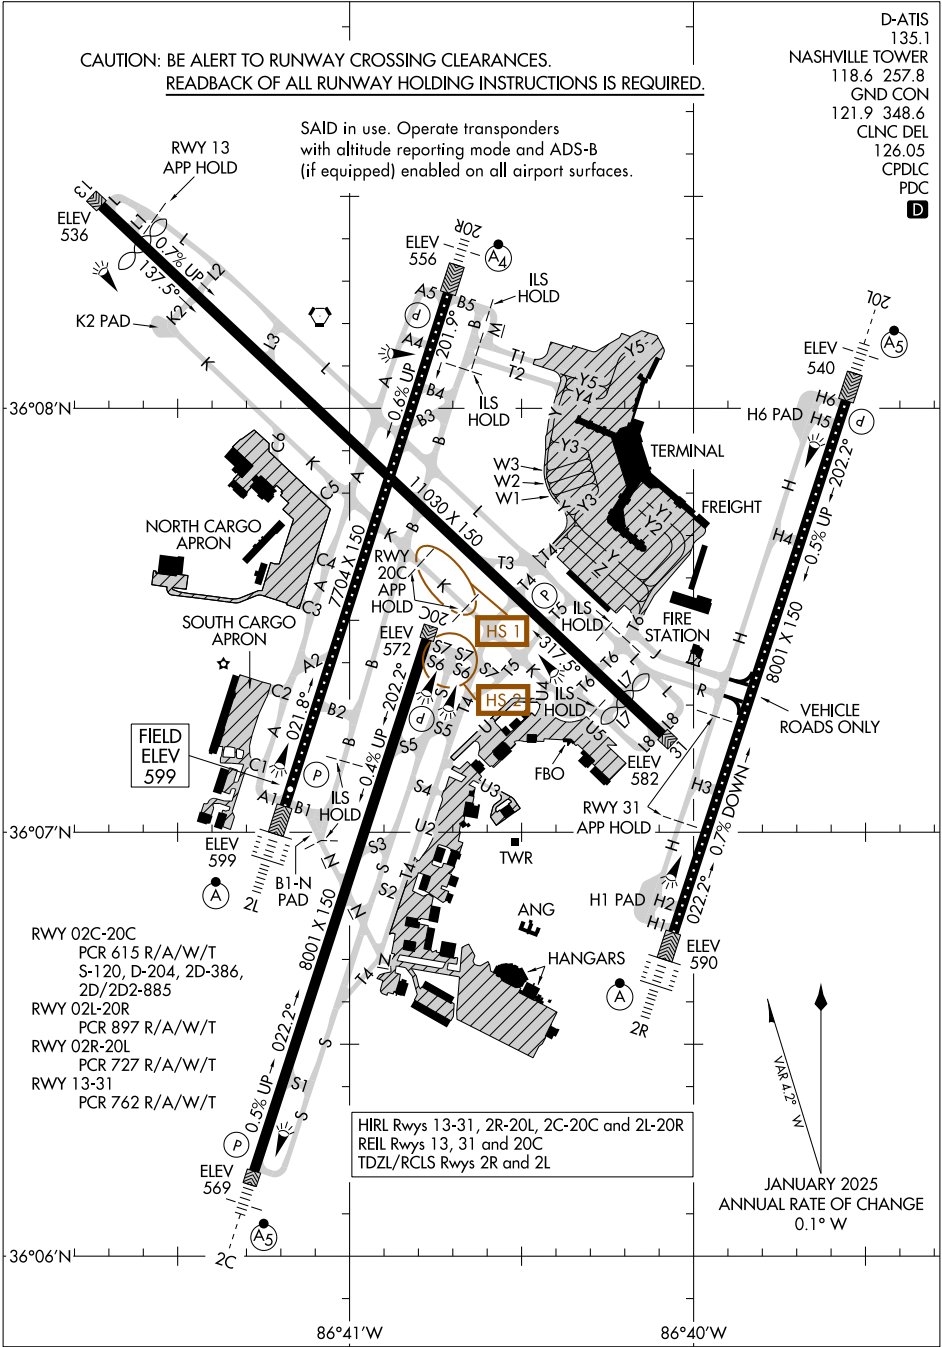

RWY 02C-20C
PCR 615 R/A/W/T
S-120, D-204, 2D-386,
2D/2D2-885
RWY 02L-20R
PCR 897 R/A/W/T
RWY 02R-20L
PCR 727 R/A/W/T
RWY 13-31
PCR 762 R/A/W/T

HIRL Rwy 13-31, 2R-20L, 2C-20C and 2L-20R
REIL Rwy 13, 31 and 20C
TDZL/RCLS Rwy 2R and 2L

VAR 4.2° W
JANUARY 2025
ANNUAL RATE OF CHANGE
0.1° W

SE-1, 22 JAN 2026 to 19 FEB 2026

SE-1, 22 JAN 2026 to 19 FEB 2026