

GDOGG FOUR DEPARTURE (RNAV)

NASHVILLE INTL (BNA)
NASHVILLE, TENNESSEE

NASHVILLE DEP CON
119.35 372.0
D-ATIS 135.1
CLNC DEL 126.05
CPDLC
GND CON
121.9 348.6
NASHVILLE TOWER
118.6 257.8

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE:
15000

TAKEOFF MINIMUMS:


Rwy 13: Standard.

Rwy 2L/C/R, 20L/R: Standard with minimum climb of 500'/NM to 1099.

Rwy 20C: Standard with minimum climb of 500'/NM to 1300.

Rwy 31: Standard with minimum climb of 250'/NM to 3000.

NOTE: Jet aircraft only.

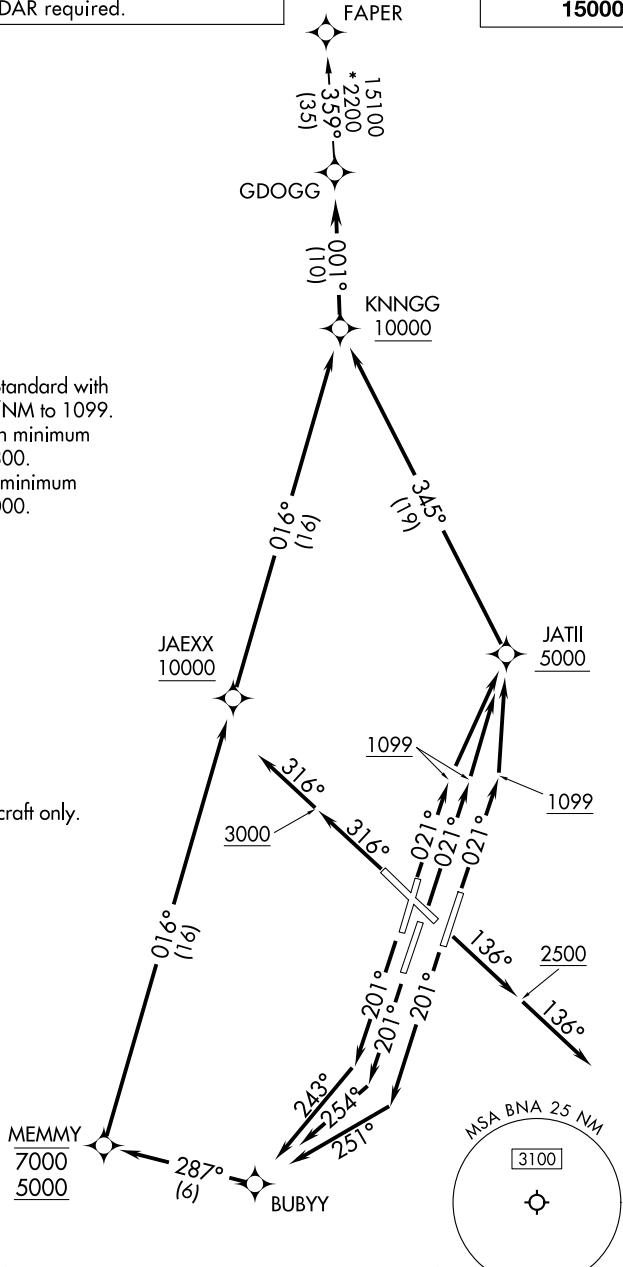

(CONTINUED ON FOLLOWING PAGE)

▼

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 2L/C/R: Climb on heading 021° to 1099, then direct to cross JATII at or above 5000, then on track 345° to cross KNNGG at or above 10000, thence. . . .

TAKEOFF RUNWAY 13: Climb on heading 136° to 2500, then on heading 136° or as assigned by ATC for RADAR vectors to cross KNNGG at or above 10000, thence. . . .

TAKEOFF RUNWAY 20L: Climb on heading 201° to intercept course 251° to BUBYY, then on track 287° to cross MEMMY between 5000 and 7000, then on track 016° to cross JAEXX at or above 10000, then on track 016° to cross KNNGG at or above 10000, thence. . . .

TAKEOFF RUNWAY 20C: Climb on heading 201° to intercept course 254° to BUBYY, then on track 287° to cross MEMMY between 5000 and 7000, then on track 016° to cross JAEXX at or above 10000, then on track 016° to cross KNNGG at or above 10000, thence. . . .

TAKEOFF RUNWAY 20R: Climb on heading 201° to intercept course 243° to BUBYY, then on track 287° to cross MEMMY between 5000 and 7000, then on track 016° to cross JAEXX at or above 10000, then on track 016° to cross KNNGG at or above 10000, thence. . . .

TAKEOFF RUNWAY 31: Climb on heading 316° to 3000, then on heading 316° or as assigned by ATC for RADAR vectors to cross KNNGG at or above 10000, thence. . . .

. . . . on track 001° to GDOGG. Maintain 15000. Expect filed altitude 10 minutes after departure.

FAPER TRANSITION (GDOGG4.FAPER)