


|                                                 |                        |                                                                        |
|-------------------------------------------------|------------------------|------------------------------------------------------------------------|
| LOC/DME I-BNA<br><b>109.9</b><br>Chan <b>36</b> | APP CRS<br><b>021°</b> | Rwy Ldg<br>TDZE<br>Apt Elev<br><b>7702</b><br><b>599</b><br><b>599</b> |
|-------------------------------------------------|------------------------|------------------------------------------------------------------------|

ILS or LOC RWY 2L  
NASHVILLE INTL (BNA)

|                                                            |        |                                                                                                                                                     |
|------------------------------------------------------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| DME or RADAR required. RADAR required for procedure entry. | ALSF-2 | MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 on heading 240° and on BNA VORTAC R-270 to BEVEE/BNA VORTAC 22.4 DME/RADAR and hold. |
| Simultaneous approach authorized.                          |        |                                                                                                                                                     |

|                        |                                                                                        |                                       |                               |
|------------------------|----------------------------------------------------------------------------------------|---------------------------------------|-------------------------------|
| D-ATIS<br><b>135.1</b> | NASHVILLE APP CON<br><b>118.4 360.7</b> (030°-196°)<br><b>119.35 372.0</b> (197°-029°) | NASHVILLE TOWER<br><b>118.6 257.8</b> | GND CON<br><b>121.9 348.6</b> |
|------------------------|----------------------------------------------------------------------------------------|---------------------------------------|-------------------------------|

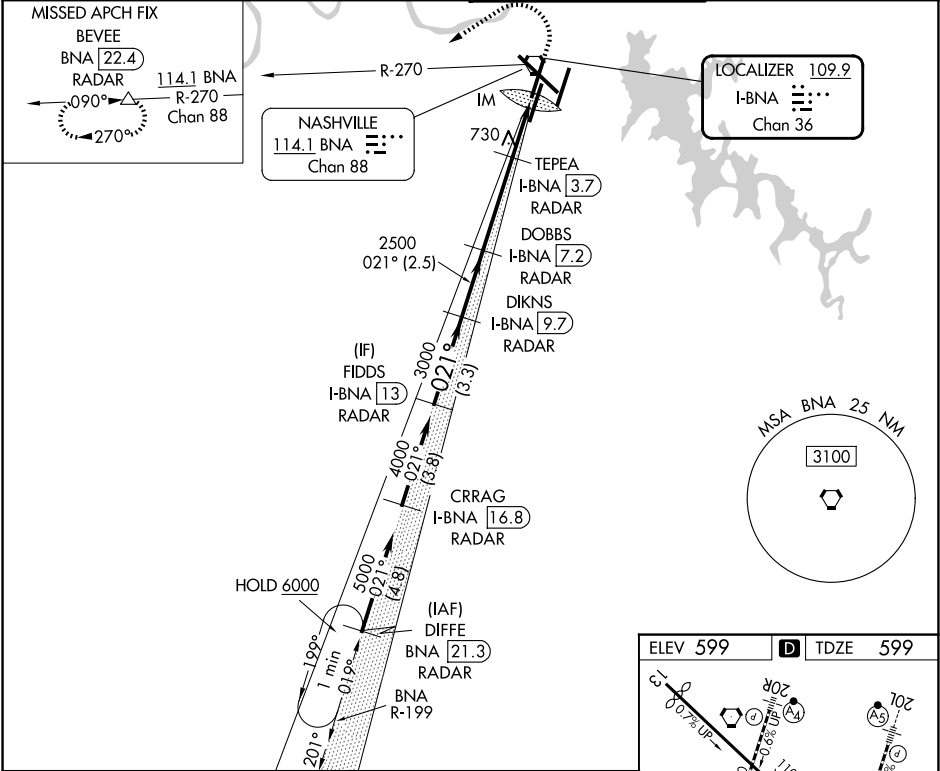

|          |                              |                               |                               |                               |                                         |            |
|----------|------------------------------|-------------------------------|-------------------------------|-------------------------------|-----------------------------------------|------------|
|          | FIDDS<br>I-BNA [13]<br>RADAR | DIKNS<br>I-BNA [9.7]<br>RADAR | DOBBS<br>I-BNA [7.2]<br>RADAR | TEPEA<br>I-BNA [3.7]<br>RADAR | BNA R-270<br>I-BNA [2.5]<br>I-BNA [1.4] | BEVEE<br>△ |
|          | 4000                         | 3000                          | 2500                          | 1380                          | 2500                                    |            |
|          | GS 3.00°<br>TCH 55           |                               |                               |                               |                                         |            |
|          | 3.3 NM                       | 2.5 NM                        | 3.5 NM                        | 1.3 NM                        | 0.8                                     | 0.2        |
| CATEGORY | A                            | B                             | C                             | D                             |                                         |            |
| S-ILS 2L |                              | 799/18                        | 200 (200-½)                   |                               |                                         |            |
| S-LOC 2L | 980/24                       | 381 (400-½)                   | 980/35                        | 381 (400-½)                   |                                         |            |
| CIRCLING | 1100-1<br>501 (600-1)        | 1120-1<br>521 (600-1)         | 1200-1¾<br>601 (700-1¾)       | 1380-2½<br>781 (800-2½)       |                                         |            |

