
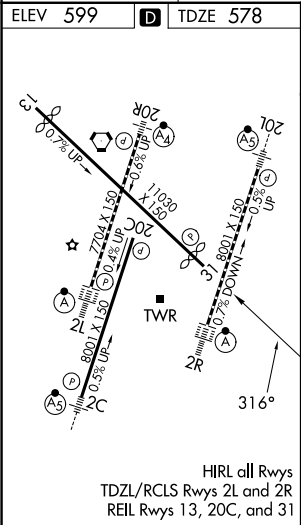


WAAS CH 65913 W31A	APP CRS 316°	Rwy Ldg TDZE 578 Apt Elev 599
--	------------------------	---

RNAV (GPS) Y RWY 31

NASHVILLE INTL (BNA)

RNP APCH - GPS.		MISSED APPROACH: Climb to 1400 then climbing left turn to 4000 direct BEVEE and hold.	
▼ ▲	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C.		
D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6

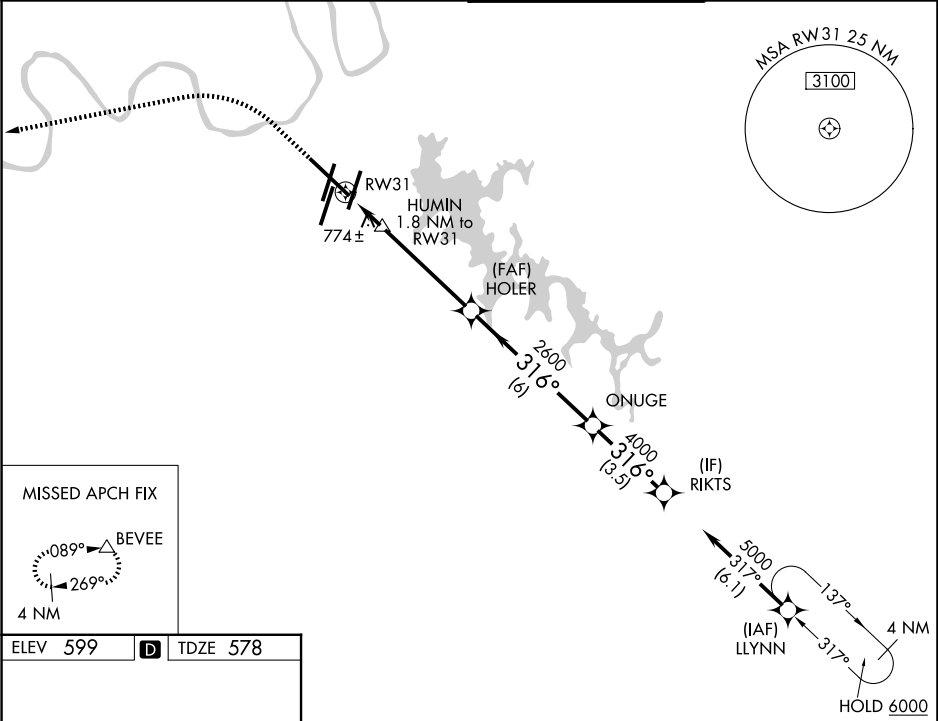

1400		4000		BEVEE	
↑		↩		△	
RWY 31		HUMIN 1.8 NM to RWY 31		HOLER 2600	
1.3 NM		0.5 NM		4.4 NM	
CATEGORY		A		B	
LPV DA		778-3/4		200 (200-3/4)	
LNAV/VNAV DA		1040-1 3/8		462 (500-1 3/8)	
LNAV MDA		1040-1		462 (500-1)	
CIRCLING		1100-1 501 (600-1)		1120-1 521 (600-1)	
		1160-1 1/2 561 (600-1 1/2)		1380-2 1/2 781 (800-2 1/2)	