


APP CRS	Rwy Ldg	6501
288°	TDZE	10
	Apt Elev	18

RNAV (RNP) Y RWY 29


NEWARK LIBERTY INTL (EWR)

RNP AR APCH. RF required.	MISSED APPROACH: Climb to 2000 on track 288° to MUFIE and hold. *Missed approach requires minimum climb of 417 feet per NM to 800.
---------------------------	---

D-ATIS 115.7 134.825	NEWARK APP CON 128.55 379.9	NEWARK TOWER 118.3 257.6	GND CON 121.8
-------------------------	--------------------------------	-----------------------------	------------------

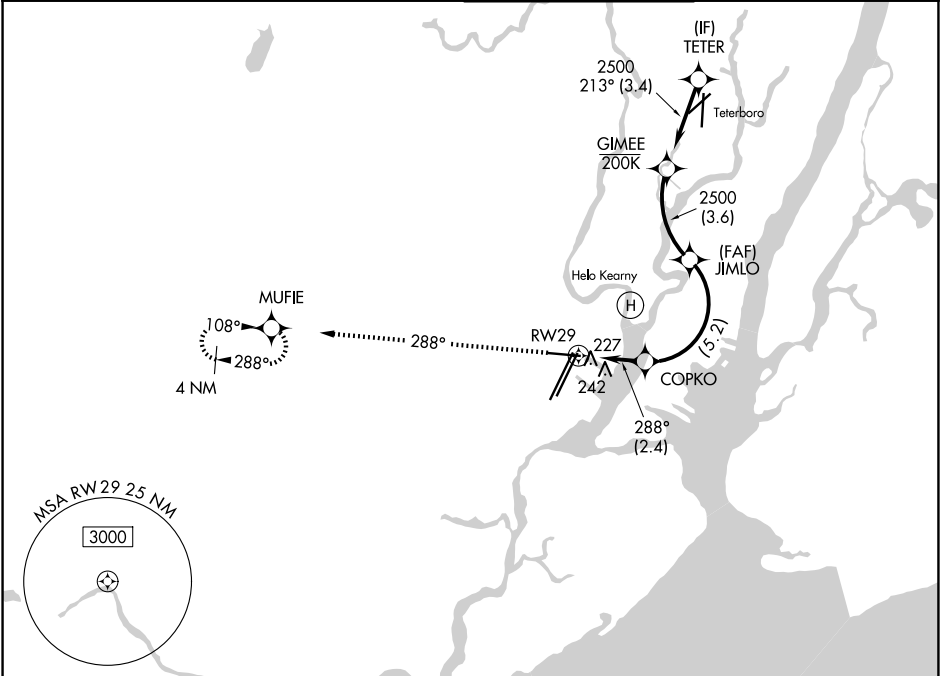

ELEV 18	D	TDZE 10
---------	---	---------

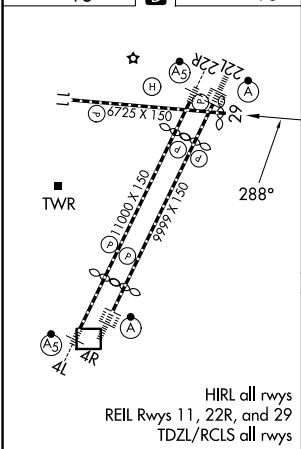

2000	tr 288°	MUFIE		
The diagram illustrates the vertical profile of the RNP Y RWY 29 approach. It shows a series of segments with specific vertical curve data and horizontal distances. The segments are labeled with their respective vertical curve points: RW29, COPKO, JIMLO, GIMEE, and TETER. The vertical curve data includes the start point, the vertical curve length (e.g., 834, 2500, 2500), and the end point. The horizontal distances between the vertical curve points are 2.4 NM, 5.2 NM, 3.6 NM, and 3.4 NM. The diagram also shows the approach gradient (GP 3.00%) and the threshold crossing height (TCH 60). The vertical curve data is summarized in the table below.				
CATEGORY	A	B	C	D
RNP 0.16 DA		461-1 ³ / ₈	451 (500-1 ³ / ₈)	
RNP 0.30 DA*		583-1 ³ / ₈	573 (600-1 ³ / ₈)	
RNP 0.30 DA		625-1 ³ / ₄	615 (700-1 ³ / ₄)	

AUTHORIZATION REQUIRED

RNAV (RNP) Y RWY 29