


WAAS CH 53531 W26A	APP CRS 260°	Rwy Ldg 10496 TDZE 4659 Apt Elev 4729
--	------------------------	--


RNAV (GPS) RWY 26L

PUEBLO MEML (PUB)

RNP APCH-GPS.				MISSED APPROACH: Climb to 7000 direct MERTZ and hold.		
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.						
ATIS 125.25	DENVER APP CON ★ 120.1 290.5		PUEBLO TOWER ★ 119.1 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 120.9	UNICOM 122.95

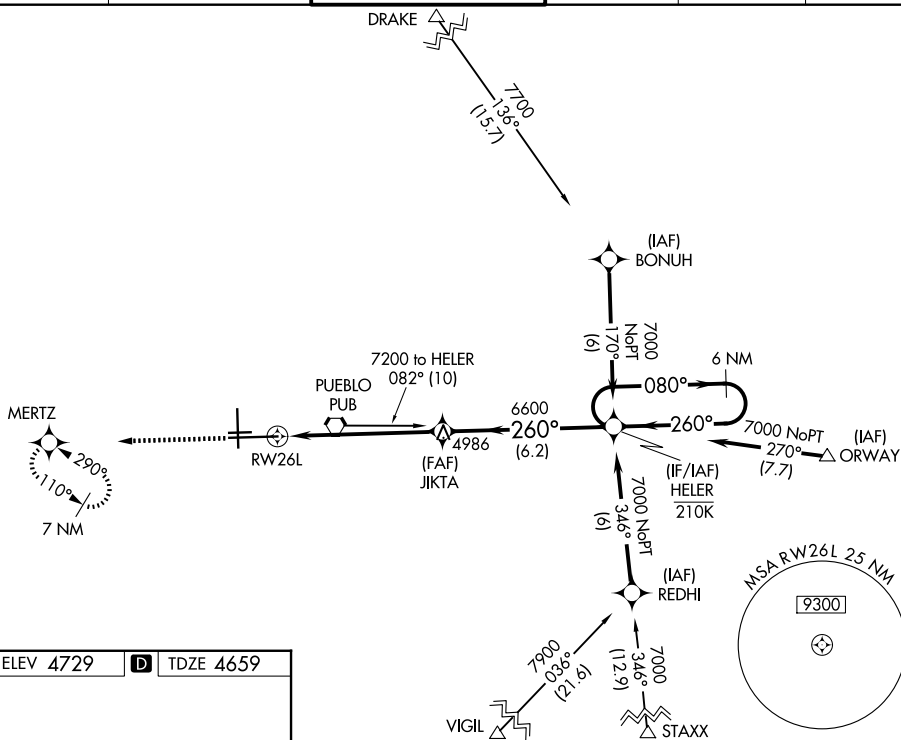

ELEV 4729	D	TDZE 4659
-----------	----------	-----------



HELER

6 NM
Holding Pattern

7000
080° →
← 260°

JIKTA
6600
260°
6600

RW26L

*1.4 NM to RW26L

*LNAV only

GP 3.00°
TCH 60

CATEGORY	A	B	C	D
LPV DA	4859-¾ 200 (200-¾)			
LNAV/VNAV DA	4979-1 320 (300-1)			
LNAV MDA	5100-1	441 (400-1)	5100-1⅓	441 (400-1⅓)
CIRCLING	5340-1	611 (700-1)	5580-2½ 851 (900-2½)	5800-3 1071 (1100-3)