


VORTAC RBL	APP CRS	Rwy Ldg	5431
115.7	149°	TDZE	352
Chan 104		Apt Elev	352

VOR/DME RWY 15
RED BLUFF MUNI (RBL)


⚠ When local altimeter setting not received, use Redding altimeter setting and increase all MDAs and all Cat C/D visibility ¼ SM. VDP NA with Redding altimeter setting.

MISSD APPROACH: Climb to 2000 direct RBL VORTAC and hold.

ASOS 120.775	OAKLAND CENTER 132.2 350.3	UNICOM 123.0 (CTAF) 📶
-----------------	-------------------------------	---------------------------------

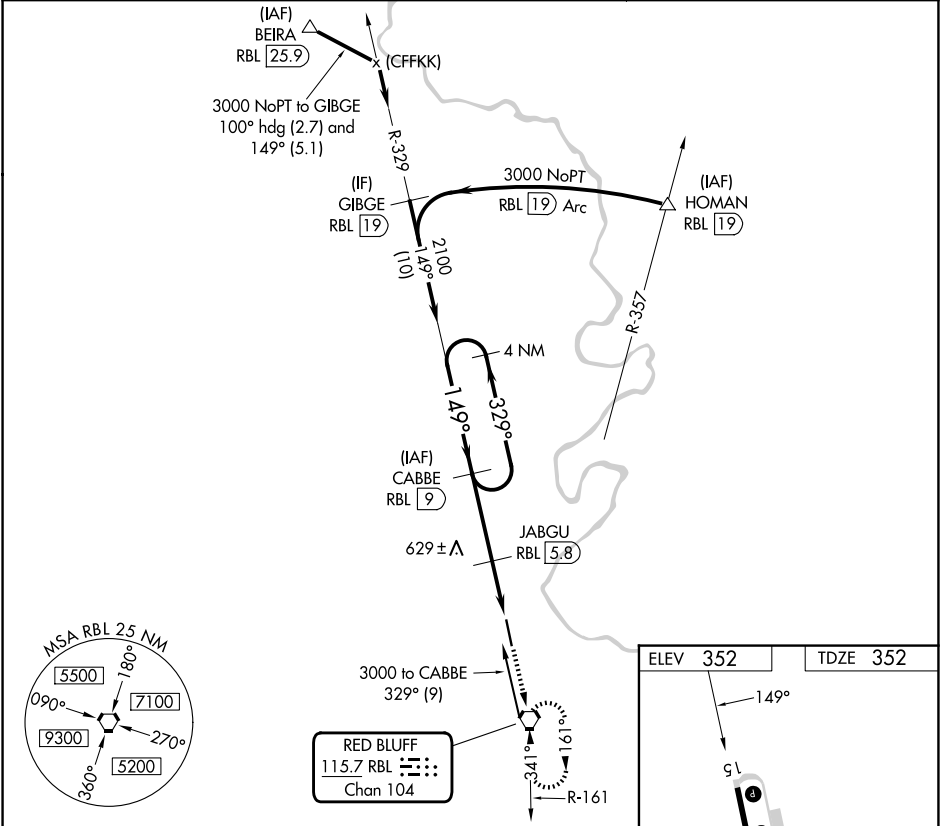

CATEGORY	4 NM Holding Pattern		CABBE RBL 9		JABGU RBL 5.8		2000 RBL		
	2100 ← 329° 149° →		149°		RBL 5.2		RBL 3.6		
	2.99° TCH 40		1080		0.6 NM		1.6 NM		
		3.2 NM							
		A		B		C		D	
S-15	880-1 528 (600-1)				880-1½ 528 (600-1½)				
CIRCLING	880-1 528 (600-1)				900-1½ 548 (600-1½)		1060-2¼ 708 (800-2¼)		

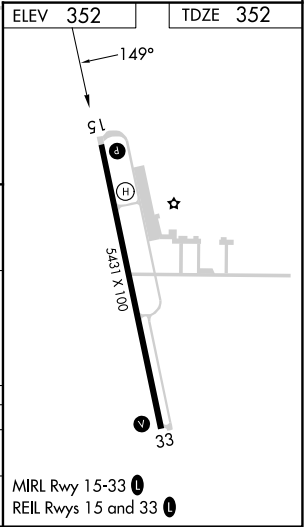

SW-2, 22 JAN 2026 to 19 FEB 2026

SW-2, 22 JAN 2026 to 19 FEB 2026