

LOC I-EZD	APP CRS	Rwy Ldg	6607
110.9	023°	TDZE	161
		Apt Elev	168

ILS or LOC RWY 2


RICHMOND INTL (RIC)

Rwy 2 helicopter visibility reduction below ¾ SM NA.
For inop ALS, increase S-ILS 2 all Cats visibility to ⅝ SM and S-LOC 2 Cats A and B visibility to 1 SM.

MALSRR

MISSED APPROACH: Climb to 2000 on RIC VORTAC R-018 to EPICS INT/RIC 17.3 DME and hold.

ATIS	POTOMAC APP CON	RICHMOND TOWER	GND CON
119.15 263.025	126.4 282.375 (001°-185°) 126.75 307.2 (186°-360°)	121.1 257.8	121.9 348.6

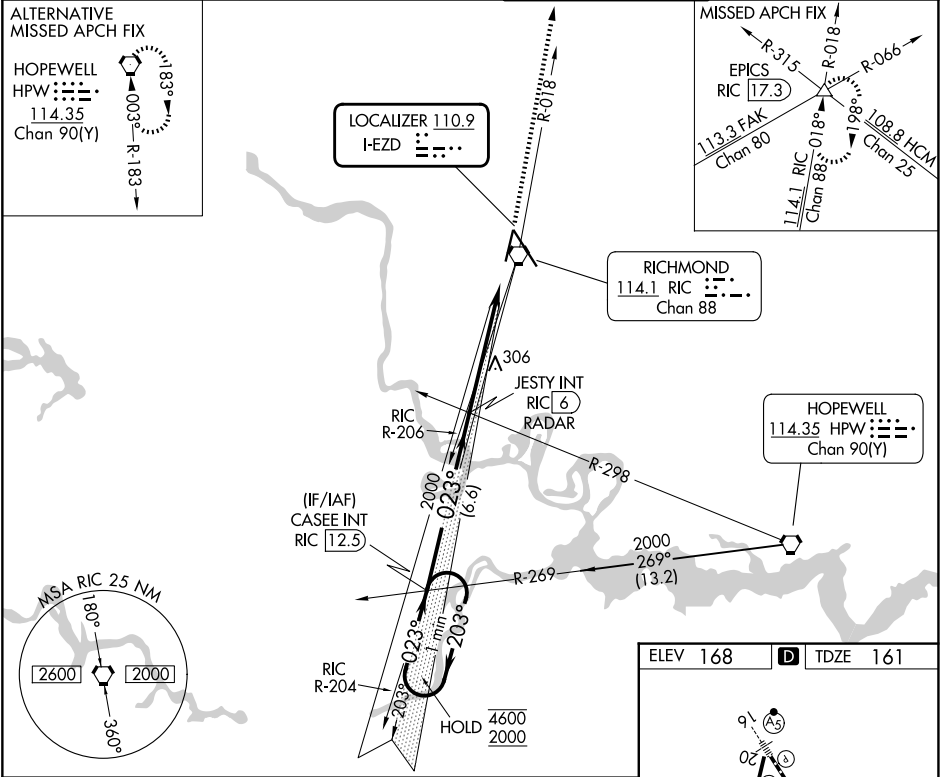

One Minute Holding Pattern	CASEE INT RIC 12.5	JESTY INT RIC 6 RADAR	2000 RIC R-018	EPICS △
4600 2000	← 203° 023° →	023°	2000	RIC 0.5
GS 3.00° TCH 50		2000		
	6.6 NM	5.6 NM		
CATEGORY	A	B	C	D
S-ILS 2	457-¾ 296 (300-¾)			
S-LOC 2	560-¾ 399 (400-¾)			
CIRCLING	660-1 492 (500-1)	700-1½ 532 (600-1½)	720-2 552 (600-2)	

