

WAAS CH 50202 W03A	APP CRS 035°	Rwy Ldg 13000 TDZE 3667 Apt Elev 3671
--	------------------------	--



RNAV (GPS) RWY 3
ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When LPA altimeter setting not received, use Artesia altimeter setting; increase LPV DA to 3997 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 4067 feet and all visibilities ½ SM; increase all MDAs 80 feet and LNAV visibility Cat C ⅓ SM, Cat D ½ SM and Circling visibility Cat D ¼ SM. Baro-VNAV and VDP NA when using Artesia altimeter setting.

MISSED APPROACH: Climb to 6000 direct AQZED and hold.

ATIS 128.45 306.2	ROSWELL APP CON ★ 119.6 239.0	ROSWELL TOWER ★ 118.5(CTAF) 0 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
----------------------	----------------------------------	--	------------------------	----------------------------	------------------

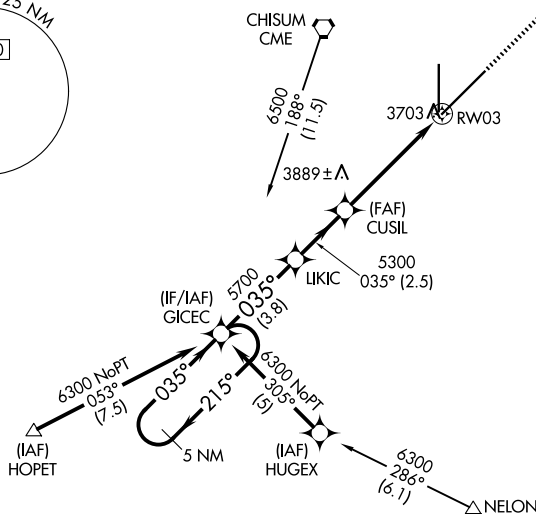

MISSED APCH FIX



5 NM Holding Pattern

GICEC

LIKIC

CUSIL

6000

AQZED

6300 ← 215°

035° →

035°

5700

5300

1.3 NM to RW03

RW03

GP 3.00° TCH 50

3.8 NM

2.5 NM

3.6 NM

1.3 NM

CATEGORY		A	B	C	D
LPV	DA	3917-3/4 250 (300-3/4)			
LNAV/ VNAV	DA	3987-1 320 (400-1)			
LNAV	MDA	4140-1 473 (500-1)	4140-1 1/4 473 (500-1 1/4)		4140-1 1/2 473 (500-1 1/2)
CIRCLING		4140-1 469 (500-1)	4140-1 1/2 469 (500-1 1/2)		4300-2 629 (700-2)

