
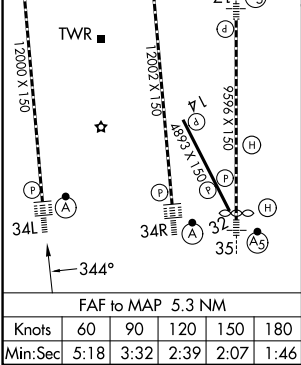


LOC/DME I-UUH	APP CRS	Rwy Ldg	12000
111.9	344°	TDZE	4229
Chan 56		Apt Elev	4231

ILS or LOC RWY 34L
SALT LAKE CITY INTL (SLC)

RNP APCH - GPS. From QWENN or JAZZZ.		ALSIF-2 	MISSED APPROACH: Climb to 4800 then climbing left turn to 8100 on TCH VORTAC R-249 to STACO INT/TCH 20 DME and hold.		
DME or RADAR required.					
 Simultaneous approach authorized. For inop ALS, increase S-LOC 34L Cat C/D visibility to RVR 6000.					
D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON	CLNC DEL	CPDLC
124.75 125.625	125.7 284.6	132.65 336.4	123.775 348.6	127.3 379.975	

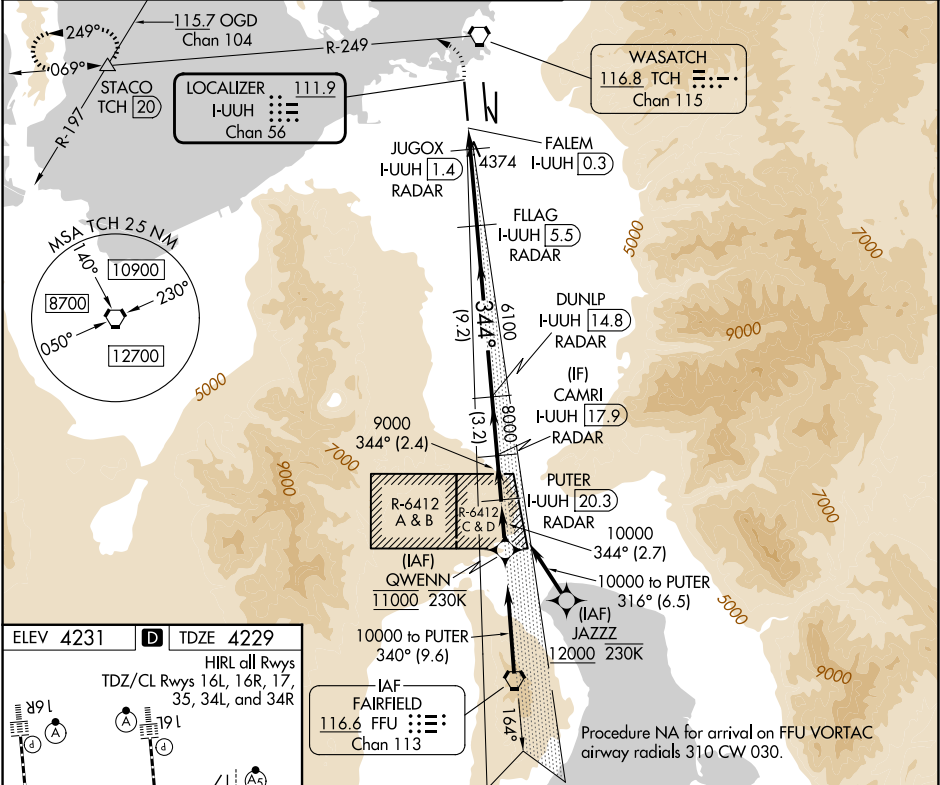

ELEV 4231		TDZE 4229	HIRL all Rwy 16L, 16R, 17, 35, 34L, and 34R			
TCH R-249		VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 73).		PUTER CAMRI I-UUH [20.3] I-UUH [17.9] RADAR		
JUGOX I-UUH [1.4] RADAR		FLAG I-UUH [5.5] RADAR		DUNLP I-UUH [14.8] RADAR		
FALEM I-UUH [0.3] RADAR		6100		8000		
4780		4.1 NM		9.2 NM		
CATEGORY		A		B		C
S-ILS 34L		4429/18		200 (200-1/2)		
S-LOC 34L		4640/24		411 (500-1/2)		4640/40 411 (500-3/4)

SW-4, 22 JAN 2026 to 19 FEB 2026

SW-4, 22 JAN 2026 to 19 FEB 2026