

SALT LAKE CITY, UTAH

AL-365 (FAA)



25219

WAAS CH 49230 W34A	APP CRS 344°	Rwy Ldg 12002 TDZE 4225 Apt Elev 4231
--	------------------------	--

RNAV (GPS) Y RWY 34R
SALT LAKE CITY INTL (SLC)

RNP APCH - GPS.		ALSF-2	MISSED APPROACH: Climb to 9000 direct TCH VORTAC and on track 336° to OGD VORTAC and hold.
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 49°C. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to RVR 5000, LNAV Cots C/D visibility to RVR 5500, LNAV Cat E visibility to RVR 6000. Cat E restricted to USAF/USN aircraft.			

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON	CLNC DEL	CPDLC
124.75 125.625	125.7 284.6	119.05 257.8	123.775 348.6	127.3 379.975	

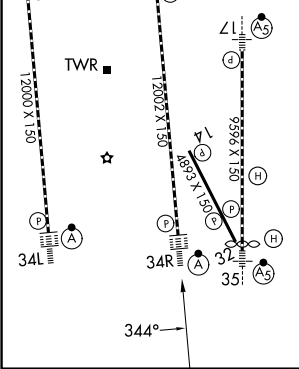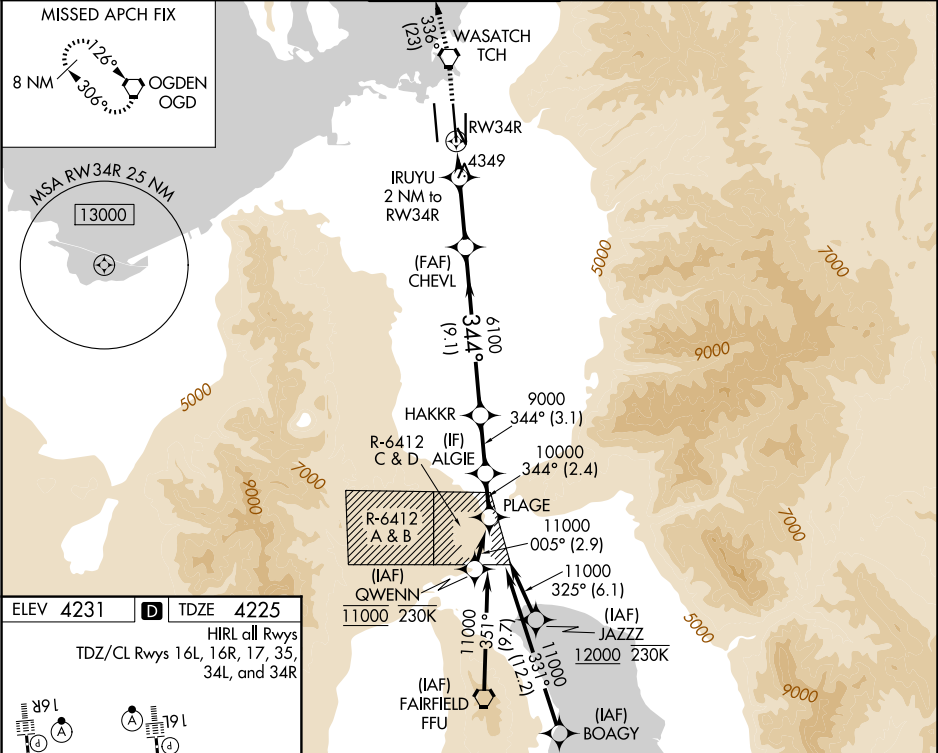

9000	TCH	ir 336°	OGD	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 73).	PLAGE
					ALGIE
					HAHKK
					CHEVL
					IRUYU 2 NM to RW34R
					1 NM to RW34R
					RW34R
					4900
					6100
					9000
					344°
					11000
					10000
					GP 3.00° TCH 55
					1 NM
					1 NM
					3.8 NM
					9.1 NM
					C
					D
					E
CATEGORY	A	B	C	D	E
LPV DA			4425/18	200 (200-½)	
LNAV/VNAV DA			4557/26	332 (400-½)	
LNAV MDA	4600/24	375 (400-½)	4600/35	375 (400-¾)	4640/40 415 (500-¾)

SALT LAKE CITY, UTAH
Amdt 2 20FEB25

40°47'N-111°59'W

SALT LAKE CITY INTL (SLC)
RNAV (GPS) Y RWY 34R

SW-4, 22 JAN 2026 to 19 FEB 2026

SW-4, 22 JAN 2026 to 19 FEB 2026